FALCON WAREHOUSE



STREAMLIGHT®

PROFESSIONAL
ILLUMINATION TOOLS

TABLE OF CONTENTS BY PRODUCT LINE

// STINGER AND STRION SERIES


Stinger LED HL® // Stinger DS LED HL® pg. 6


Stinger® LED // Stinger DS® LED pg. 6


Stinger® 2020 pg. 7


PolyStinger® LED pg. 7


Strion® 2020 pg. 8


Strion® DS HL pg. 9


Strion® LED pg. 9

// SL-20L AND SL-20LP


SL-20L® // SL-20LP® pg. 10

// WORK LIGHTS


Syclone® pg. 11


BearTrap® pg. 11


Stinger Switchblade® pg. 12


Strion Switchblade® pg. 12

// PORTABLE SCENE LIGHTS AND LANTERNS


Portable Scene Light II pg. 13


Portable Scene Light pgs. 14-15


Vulcan Clutch® pg. 16


E-Flood® LiteBox® pg. 17


E-Spot® LiteBox® pg. 17


Vulcan® 180 HAZ-LO® ATEX pg. 18


Vulcan® 180 pg. 18


Vulcan® LED ATEX pg. 19


Fire Vulcan® LED pg. 20

// WAYPOINT SERIES


Waypoint® pg. 21


Waypoint® 400 pg. 21

// SIEGE SERIES


Super Siege® pg. 22


The Siege® pg. 23


Siege® AA pg. 23

// SURVIVOR AND VANTAGE SERIES



Survivor® ATEX
pg. 24



Survivor® X
ATEX pg. 24



Survivor Pivot®
ATEX pg. 25



Vantage® II
pg. 26



Vantage® 180 X
USB pg. 26

// DUALIE SERIES



Dualie® 3AA ATEX
pg. 27



Dualie® 3AA Laser
ATEX pg. 27

// DUALIE SERIES



Dualie® Rechargeable
pg. 28



Dualie® 2AA / 2AA
ATEX pg. 28



Dualie® 3AA Color-Rite
ATEX pg. 29

// PROPOLYMER SERIES



2AAA ProPolymer®
HAZ-LO® ATEX pg. 30



4AA ProPolymer® LED®
pg. 30



2AA ProPolymer® HAZ-LO® /
HAZ-LO® ATEX pg. 31

// HEADLAMPS



USB HAZ-LO® Headlamp
pg. 66



Enduro® Pro HAZ-LO®
ATEX pg. 66



3AA HAZ-LO®
ATEX pg. 67



ProTac® 2.0
Headlamp pg. 67



Twin-Task® USB
Headlamp pg. 68



Bandit® Pro
pg. 68



Enduro® Pro USB
pg. 69



Enduro®
pg. 69



Trident®
pg. 70



Septor®
pg. 70

// STREAMLIGHT JR. F-STOP



Streamlight Jr. F-STOP®
pg. 71

// STREAM SERIES

NEW



MegaStream® USB
pg. 71



MacroStream® USB
pg. 72



MicroStream®
pg. 73



MicroStream® USB
pg. 73

// STYLUS SERIES



Stylus® UV
pg. 74



Stylus Reach®
pg. 74



Stylus® ATEX
pg. 74



Stylus Pro®
pg. 74

NEW



Stylus Pro® HAZ-LO®
pg. 75

// KEYCHAIN LIGHTS



ClipMate® USB
pg. 75



Pocket Mate®
pg. 75

TABLE OF CONTENTS BY PRODUCT LINE

// TLR-1 and TLR-2


TLR-1 HL®
pg. 34


TLR-1® // TLR-1®s
pg. 34

NEW

TLR-1 HL®-X
pg. 35


TLR-2 HL®
pg. 36


TLR-2 HL® G
pg. 36


TLR-2® G
pg. 36

// TLR-3, TLR-6 and TLR-7 X CONTOUR REMOTE


TLR-3®
pg. 37


TLR-6®
pg. 37


TLR-6® HL / TLR-6® HL G
pg. 38


TLR-7® X Contour Remote
pg. 39

// TLR-7 X AND TLR-8 X SERIES

NEW

TLR-7® HL-X
pg. 40

NEW

TLR-8® HL-X
pg. 40

NEW

TLR-7® HL-X sub
pg. 41

NEW

TLR-8® HL-X sub
pg. 41

NEW

TLR-8® HL-X G sub
pg. 41


TLR-7® X
pg. 42


TLR-7® X sub
pg. 42

NEW

TLR-8® X
pg. 43

NEW

TLR-8® X G
pg. 43

NEW

TLR-8® X sub
pg. 43

NEW

TLR-8® X G sub
pg. 43

// TLR-9 and TLR-10


TLR-9®
pg. 44


TLR-10®
pg. 44

// TL-RACKER


TL-Racker®
pg. 45

// TLR RM 1 AND 2 SERIES


TLR® RM 1
pg. 46


TLR® RM 2
pg. 46


TLR® RM 1 Laser
pg. 47


TLR® RM 2 Laser
pg. 47

NEW

TLR® RM 1 HL-X
pg. 48

// SPEEDLOCKER AND RECHARGEABLE BATTERIES



SpeedLocker®
pg. 48

NEW



SL-B9® Battery Pack
pg. 49



SL-B50® Battery Pack
pg. 57



SL-B26® Battery Pack and Bank Charger
pg. 61

// PROTAC RAIL MOUNT SERIES



ProTac® Rail Mount 1
pg. 50



ProTac® Rail Mount 2
pg. 50



ProTac® Rail Mount HL-X
pg. 51



ProTac® Rail Mount HL-X Pro
pg. 51



ProTac® Rail Mount HL-X Laser
pg. 52

// PROTAC RAIL MOUNT SERIES



ProTac® 2.0 Rail Mount
pg. 53

NEW



ProTac® Rail Mount HP-X Pro
pg. 54

NEW



ProTac® 2.0 Rail Mount HP
pg. 55

// WEDGE SERIES



Wedge®
pg. 56



Wedge® XT
pg. 56

// PROTAC SERIES



ProTac® 2.0
pg. 57

NEW



ProTac® 2AA-X
pg. 58

NEW



ProTac HL® 6
pg. 58



ProTac® 90X
pg. 59



ProTac® 1L-1AA
pg. 59



ProTac® 2L-X
pg. 59



ProTac HL® USB
pg. 59

// POLYTAC SERIES



PolyTac®
pg. 60



PolyTac® 90 X USB
pg. 60



PolyTac® X
pg. 60

// SIDEWINDER SERIES



Sidewinder Stalk®
pg. 62



Sidewinder®
pg. 63



Sidewinder Compact® II
pg. 63

NEW



Sidewinder® X
pg. 64

STINGER LED HL® // STINGER DS LED HL®

IPX4



High-lumen torch provides maximum illumination

- Wide beam pattern gives you a bright flood light
- High, medium, low and strobe modes; recharges in 4.5 hours
- DS model provides both a tailcap and head switch

	HIGH	MEDIUM	LOW
LUMENS	800	400	200
CANDELA	24,000	12,000	6,000
DISTANCE	310m	219m	155m
RUN TIME	1.5 hrs	2.5 hrs	5 hrs

Strobe runs 3 hours



Description	Item #
Stinger LED HL - Light Only - Black	75429
Stinger DS LED HL - 12V DC - Black	75456

Size and Weight	Battery
LED HL: 21.36 cm; 352g // DS LED HL: 22.48 cm; 364g	NiMH

STINGER® LED // STINGER DS® LED

IPX4

All-purpose lighting tool designed for the broadest range of lighting needs

- Recharges within 4.5 hours
- Multiple lighting modes: high, medium, low and strobe
- The DS model provides both a tailcap and head switch

	HIGH	MEDIUM	LOW
LUMENS	425	200	100
CANDELA	26,000	12,000	6,000
DISTANCE	322m	219m	155m
RUN TIME	3 hrs	5.5 hrs	10 hrs

Strobe runs 7.5 hours



Description	Item #
Stinger LED - Light Only - Black	75710
Stinger LED - 12V DC - Black	75712
Stinger LED - 230V AC - Black	75961
Stinger LED - 230V AC/12V DC - 2 Holders - Black	75962
Stinger DS LED - 12V DC - Black	75812

Size and Weight	Battery
LED: 21.36 cm; 352g // DS LED: 22.48 cm; 364g	NiMH

STINGER® 2020

IPX7

Rechargeable, high-lumen torch with intuitive mode selector switch

- Dual power switches and mode selector switch for ease of use
- Multiple charging options
- Anti-roll design

	HIGH	MEDIUM	LOW
LUMENS	2,000	850	100
CANDELA	25,000	10,000	1,200
DISTANCE	315m	200m	70m
RUN TIME	2 hrs	4 hrs	24 hrs

Strobe runs 3.25 hours

2000 LUMENS



Description	Item #
Stinger 2020 - 230V AC/12V DC - 1 holder - Black	78102
Stinger 2020 - 240V AC/12V DC - 1 holder - Black	78103
Stinger 2020 - Light only - Includes “Y” USB cord - Black	78100

Size and Weight	Battery
19.48 cm; 350g	(2) SL-B26 battery packs

POLYSTINGER® LED

IPX4

All-purpose, polymer flashlight is designed for the broadest range of lighting needs at the best value

- Unbreakable, scratch-resistant polycarbonate lens
- Four lighting modes: high, medium, low and strobe
- LED technology provides the brightness and run time you need

	HIGH	MEDIUM	LOW
LUMENS	485	240	120
CANDELA	28,000	14,000	7,000
DISTANCE	335m	237m	167m
RUN TIME	3 hrs	5.5 hrs	10 hrs

Strobe runs 7.5 hours




Description	Item #
PolyStinger LED - 240V AC/12V DC - Black	76151
PolyStinger LED - 230V AC/12V DC - 2 holders - Black	76152
PolyStinger LED - Light only - Includes “Y” USB cord - Yellow	76160

Size and Weight	Battery
20.5 cm; 326g	NiMH

STINGER ACCESSORIES

DESCRIPTION	ITEM #	STINGER 2020	STINGER DS LED / STINGER LED	STINGER LED HL / STINGER DS LED HL	POLYSTINGER LED
Smart Charger	75105	√	√	√	√
NiMH Battery Stick	75375		√	√	√
SL-B26 Battery Pack	22102	√			
230V AC Charge Cord	22061	√	√	√	√
Red Wand	75903	√	√	√	√
Yellow Wand	75904	√	√	√	√



74105


75375


22102


22061


75903


75904



STRION® 2020

IPX4

1200 LUMENS

Next evolution flashlight in the Strion series for long-range applications, featuring independently functioning head and tail switches and intuitive mode selctor switch

- High-lumen, hand-held torch
- Works with existing Strion series chargers; recharges in 4.5 hours
- PiggyBack® charger option available

	HIGH	MEDIUM	LOW
LUMENS	1,200	460	120
CANDELA	28,000	10,000	3,000
DISTANCE	335m	200m	110m
RUN TIME	1.75 hrs	5.5 hrs	12 hrs

Strobe runs 3.5 hours

Description	Item #
Strion 2020 - 230V AC/12V DC - 1 Holder - Black	74432
Strion 2020 - 240V AC/12V DC - 1 Holder - Black	74433
Strion 2020 - Light Only - Black	74430

Size and Weight	Battery
16.1 cm; 161.6g	Lithium-ion



Battery status indicator:
Green = Charged
Red = Needs to be Charged



STRION® DS HL

IPX4

Dual switch flexibility provides the ultimate hand holding flexibility when clearing a room

- TEN-TAP® Programming; recharges in 3.5 hours
- PiggyBack® charger option available
- DS model provides both a tailcap and head switch

	HIGH	MEDIUM	LOW
LUMENS	700	300	84
CANDELA	12,000	5,000	800
DISTANCE	219m	141m	57m
RUN TIME	1.25 hrs	3.5 hrs	24 hrs

Strobe runs 2.5 hours



Description	Item #
Strion DS HL - 12V DC - Black	74614

Size and Weight	Battery
16.08 cm; 153g	Lithium-ion

STRION® LED

IPX4

Compact, professional light designed for the broadest range of lighting needs at the best value

- Provides bright, far-reaching beam and ample peripheral light and long run times
- High, medium, low and strobe modes, recharges in 3.5 hours
- High-lumen model provides maximum illumination

	HIGH	MEDIUM	LOW
LUMENS	375	175	80
CANDELA	12,000	6,500	3,200
DISTANCE	219m	161m	113m
RUN TIME	2.5 hrs	4.75 hrs	9.5 hrs

Strobe runs 6.5 hours




Description	Item #
Strion LED - Light Only - Black	74300

Size and Weight	Battery
14.99 cm; 148g	Lithium-ion

STRION ACCESSORIES

DESCRIPTION	ITEM #	STRION LED	STRION DS HL	STRION 2020
PiggyBack® Charger Holder	74102	√	√	√
Lithium-ion Battery	74436	√	√	√
Li-ion Battery Stick	74175	√	√	√
DC1 Charge Cord (Rechargeables)	22051	√	√	√
230V AC Charge Cord	22061	√	√	√


74102



74436


74175


22051


22061



SL-20L®

IPX4

Full size, professional grade, rechargeable flashlight

- Tight beam for down range visibility
- Illuminated switch housing shows charge status; recharges in 9 hours
- Multi-function push-button switch

	HIGH	MEDIUM	LOW
LUMENS	450	225	60
CANDELA	70,000	35,000	9,000
DISTANCE	529m	374m	189m
RUN TIME	3.25 hrs	5 hrs	20 hrs

Strobe runs 4.5 hours

Description	Item #
SL-20L - 230V AC/12V DC - (2) Sleeves - Black	20705

Size and Weight	Battery
33.3 cm; 770g	NiMH



SL-20LP®

IPX4

Full size, professional grade, rechargeable flashlight

- Deep-dish parabolic reflector produces a tight beam
- Illuminated switch housing shows charge status; recharges in 4.5 hours
- Non-slip rubber comfort grip

	HIGH	MEDIUM	LOW
LUMENS	450	225	60
CANDELA	70,000	35,000	9,000
DISTANCE	529m	374m	189m
RUN TIME	3.25 hrs	5 hrs	20 hrs

Strobe runs 4.5 hours

Description	Item #
SL-20LP - 12V DC - Smart Charge - Black	25302
SL-20LP - 230V AC/12V DC - (2) Sleeves - Black	25305
SL-20LP - 12V DC - Smart Charge - Yellow	25322

Size and Weight	Battery
33.5 cm; 590g	NiMH



SL-20L / SL-20LP ACCESSORIES

DESCRIPTION	ITEM #	SL-20L	SL-20LP
Charge Sleeve	22047	√	√
DC1 Charge Cord (Rechargeables)	22051	√	√
230V AC Charge Cord	22061	√	√
NiMH Battery Stick	74375	√	√
Red Wand	22511	√	√
Yellow Wand	22519	√	√


22047


75375


22051


22061


22511


22519



SYCLONE®

IPX4

Color-Rite®

Compact, rechargeable work light with Color-Rite Technology®

- Cool white light and 90 CRI LED - each with high, medium and low modes
- Hands-free options with the flat, magnetic base and stowable hang hook
- Head swivels 360° to aim the beam

Description	Item #
Syclone - Includes USB cord - Red	61510

Size and Weight	Battery
5.3 cm; 150g	Lithium Polymer



SPOT/COOL WHITE	HIGH	MEDIUM	LOW
LUMENS	400	200	100
DISTANCE	141m	95m	72m
RUN TIME	2 hrs	4.5 hrs	9.5 hrs

FLOOD/90 CRI	HIGH	MEDIUM	LOW
LUMENS	300	150	75
DISTANCE	48m	35m	24m
RUN TIME	2 hrs	4 hrs	8 hrs

Color Temperature 4,000K

BEARTRAP®

IPX4

Rechargeable work light with multiple hands-free options and high-lumens

- Produces bright white light in both spot and flood modes
- Go hands-free - clamp it, hang it or use its magnetic base
- Will continue to charge while plugged in and in use



2000 LUMENS

	SPOT			FLOOD		
	HIGH	MEDIUM	LOW	HIGH	MEDIUM	LOW
LUMENS	1,000	450	325	2,000	1,000	575
CANDELA	7,500	3,600	2,500	1,200	680	360
DISTANCE	174m	120m	100m	69m	52m	38m
RUN TIME	4.5 hrs	8.75 hrs	12.5 hrs	2.5 hrs	5 hrs	8.75 hrs

Description	Item #
BearTrap - Int'l - 230V/240V AC - Red	61521

Size and Weight	Battery
19.37 cm; 992g	Lithium-ion





STINGER SWITCHBLADE®

IPX4

Color-Rite®

180° articulating, multi-function light bar

- Five Lights in One: droplight, hands-free light, bright white light, high CRI light with Streamlight's Color-Rite Technology® and UV light
- Strong magnet and robust hang hook for hands-free use
- Ultra thin design fits in tight spaces and folds in half for storage



	COOL WHITE	HIGH CRI (90)	UV LED
LUMENS	800	600	500 mW
RUN TIME	3.75 hrs	3.75 hrs	15 hrs





Description	Item #
Stinger Switchblade - 230V AC - 1 holder - Red	76802
Stinger Switchblade - with USB cord - Red	76800

Size and Weight	Battery
Folded: 24.89 cm; Extended: 43.18 cm; 485g	NiMH

STRION SWITCHBLADE®

IPX4

Color-Rite®

Rechargeable, 180° articulating, multi-function light bar with easy to replace battery

- Five Lights in One: droplight, hands-free light, bright white light, high CRI light with Streamlight's Color-Rite Technology® and UV light
- PiggyBack® charger option for extra battery, ready to replace and use whenever you need it
- Hands-free options including a magnet, hang hook and flat foot to stand it up



	COOL WHITE	HIGH CRI (90)	UV LED
LUMENS	500	400	500 mW
RUN TIME	3 hrs	3 hrs	5 hrs





Description	Item #
Strion Switchblade - with USB cord - Red	74850

Size and Weight	Battery
Folded: 15.24 cm; Extended: 27.3 cm; 181g	Lithium-ion



PORTABLE SCENE LIGHT II

IPX7

Cordless, compact scene light enhances safety at your work site by eliminating trip hazards

- 360° rotating head directs the light where you need it; stackable for "light tower" capability
- 18 LEDs provide 10,000 lumens to light up an entire scene
- Hooked feet for hanging over doors, guard rails, fences, etc.

10 000 LUMENS



	100%	80%	60%	40%	20%
LUMENS	10,000	8,300	6,300	4,500	2,300
RUN TIME	2 hrs	2.75 hrs	3.75 hrs	5.75 hrs	11 hrs

Description	Item #
Portable Scene Light II - 230V AC/12V DC - Includes AC/DC charge cord - Red	46001
Portable Scene Light II - 240V UK AC/12V DC - Includes AC/DC charge cord - Red	46002

Size and Weight	Battery
40.6 cm; 7.06kg	Lithium-ion

PORTABLE SCENE LIGHT

IP67

Portable and collapsible flood light

- 90° swivel neck shines light to out-of-the-way places
- Extends to full height within seconds
- Designed to adapt to tight space and rugged enough to withstand rough terrain




10 000
LUMENS

	HIGH	MEDIUM	LOW
LUMENS	10,000	5,300	2,000
CANDELA	95,000	49,500	22,450
DISTANCE	616m	445m	300m
RUN TIME	2 hrs	4 hrs	12 hrs



Description	Item #
Portable Scene Light - 230V AC/12V DC - Yellow	45671
Portable Scene Light - 240V AC/12V DC - Yellow	45672
Portable Scene Light EXT - 230V AC/12V DC - Yellow	45681

Size and Weight	Battery
57.2 cm; 11.3kg EXT: 64.8 cm; 11.6kg	Zero-maintenance, sealed lead acid; Can also be powered by 12V DC power cord

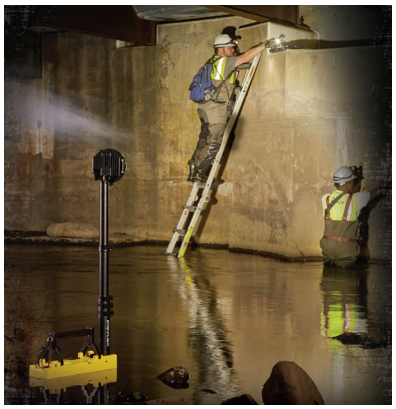









Special Features:

- Full deployment in 30 seconds
- Designed to resist 40 mph wind continuous in all directions with head fully extended
- Unlimited run time using AC/DC power source
- IP67-rated; dust-tight and WATERPROOF TO 1M FOR 30 MINUTES
- Stabilization legs provide balance on uneven surfaces

Balanced design; lead acid batteries provide ballast and stability

VULCAN CLUTCH®

IP67



Lightweight hand lantern that fully articulates for direct targeting of work

- 340° articulating head and 20° downcast head
- Versatile clamping handle
- Battery status charge indicator; recharges in 5 hours

	HIGH	LOW
LUMENS	1,700	380
CANDELA	67,500	15,000
DISTANCE	520m	245m
RUN TIME	6.5 hrs	18 hrs

Flash Runs 25 hours

1700 LUMENS

Description	Yellow
Vulcan Clutch - 230V AC/12V DC - Orange	44362
Vulcan Clutch - 230V AC/12V DC - Yellow	44372

Orange model includes quick release strap / Yellow model includes heavy duty strap

Size and Weight	Battery
23.85 cm; 1.288kg	Lithium-ion



NFPA

Charging rack meets requirements of NFPA 1900-11.1.11.2 (2024) mounted in any position





Battery status/charge indicator



Taillight LEDs ensure you can be seen even from behind



340° articulating head



Versatile clamping handle

E-FLOOD® LITEBOX®

IPX4

Lightweight, industrial duty, rechargeable hand lantern with flood beam

- Produces diffused area lighting using four LEDs within shallow reflectors for a widened beam pattern
- Large push-button switch
- Battery status/ charge indicator; recharges in 5 hours

	HIGH	LOW
LUMENS	1,500	350
CANDELA	4,700	1,000
DISTANCE	137m	63m
RUN TIME	7.5 hrs	17.75 hrs

1500 LUMENS



NFPA
Charging rack meets requirements of NFPA 1900-11.1.11.2 (2024) mounted in any position

Description	Yellow
E-Flood LiteBox Power Failure System - 230V AC/12V DC - Includes mounting rack - Orange	45808
E-Flood LiteBox Standard System - 230V AC/12V DC - Includes shoulder strap and mounting rack - Yellow	45822

Size and Weight	Battery
28.5 cm; 1406g	Lithium-ion

E-SPOT® LITEBOX®

IPX4

Industrial duty, rechargeable hand lantern with long-range, spot beam

- Produces focused lighting using four LEDs with deep parabolic reflectors
- Large push-button switch
- Battery status/ charge indicator; recharges in 5 hours

	HIGH	LOW
LUMENS	1,500	350
CANDELA	110,000	25,000
DISTANCE	663m	316m
RUN TIME	7.5 hrs	17.75 hrs

1500 LUMENS



NFPA
Charging rack meets requirements of NFPA 1900-11.1.11.2 (2024) mounted in any position

Description	Yellow
E-Spot LiteBox Power Failure System - 230V AC/12V DC - Includes mounting rack - Orange	45858
E-Spot LiteBox Standard System - 230V AC/12V DC - Includes shoulder strap and mounting rack - Yellow	45872

Size and Weight	Battery
28.5 cm; 1406g	Lithium-ion

VULCAN® 180 HAZ-LO® ATEX

IP65

Our lightest portable lantern, developed for use in hazardous locations

- 180° articulating head directs the light where you need it
- Three LEDs provide extreme brightness along with two blue taillight LEDs for visibility from behind
- Battery status/ charge indicator; recharges in 9 hours



	HIGH	LOW
LUMENS	450	130
CANDELA	25,000	8,000
DISTANCE	316m	179m
RUN TIME	16.5 hrs	32 hrs

Description	Item #
Vulcan 180 HAZ-LO ATEX - 230V AC/12V DC - Includes AC/DC chargers and quick release shoulder strap - Orange	44342
Vulcan 180 HAZ-LO ATEX - 240V UK AC/12V DC - Includes AC/DC chargers and quick release shoulder strap - Orange	44343

Size and Weight	Battery
18.8 cm; 1.12kg	Lithium-ion

II 1G Ex ia IIC T4 Ga
DEMKO 19 ATEX 2307X

NFPA Charging rack meets requirements of NFPA 1900-11.1.11.2 (2024) mounted in any position

Ex ia IIC T4 Ga
IECEx UL 19.0115X

VULCAN® 180

IP64

Our lightest portable lantern, ideal for tow truck professionals

- 180° articulating head directs the light where you need it
- Three LEDs provide extreme brightness along with two blue taillight LEDs for visibility from behind
- Battery status/ charge indicator; recharges in 9 hours

1200 LUMENS



	HIGH	LOW
LUMENS	1,200	350
CANDELA	75,000	22,000
DISTANCE	548m	296m
RUN TIME	5.75 hrs	16 hrs

Description	Item #
Vulcan 180 - Standard System - 230V AC/12V DC - Includes AC/DC chargers and heavy duty shoulder strap - Yellow - Div 2	44302
Vulcan 180 - Standard System - 230V AC/12V DC - Includes AC/DC chargers and heavy duty shoulder strap - Orange - Div 2	44312

Size and Weight	Battery
18.8 cm; 1.120kg	Lithium-ion

Class I, Div. 2, Grps. A, B, C, D;
Class II, Div. 2, Grps. F, G;
Class III; T-Class: T4

NFPA
Meets requirements of NFPA 1901-14.1.10.2 (2018) mounted in any position

VULCAN® LED ATEX

IP66

Lightweight, rechargeable LED lantern

- Tight beam is optimal for fire fighting applications
- Three LEDs provide extreme brightness along with two blue taillight LEDs for visibility from behind
- Recharges in 5 hours



	HIGH	LOW
LUMENS	180	70
CANDELA	100,000	40,000
DISTANCE	632m	400m
RUN TIME	3.5 hrs	7.5 hrs

Blink runs 5.5 hours

Description	Item #
Vulcan LED ATEX Standard System - 230V AC/12V DC - Includes quick release shoulder strap - Orange	44753
Vulcan LED ATEX Standard System- 240V UK AC/12V DC - Includes quick release shoulder strap - Orange	44751

Size and Weight	Battery
19.76 cm; 875g	Lithium-ion

II 3G Ex ec ic IIC T5 Gc
II 3D Ex tc IIIC T54°C Dc
FTZU 08 ATEX 0139X

Ex ec ic IIC T5 Gc
Ex tc IIIC T54°C Dc
IECEx FTZU 15.0038X

NFPA

Charging rack meets requirements of NFPA 1900-11.1.11.2 (2024) mounted in any position



FIRE VULCAN® LED

IPX7

Lightweight lantern featuring two ultra-bright blue taillights

- High, 100,000 candela light
- Waterproof and floats
- Programmable light function that lets you control the order in which the modes come on

	HIGH	LOW
LUMENS	180	80
CANDELA	100,000	45,000
RUN TIME	5 hrs	10 hrs



Description	Item #
Fire Vulcan LED Standard System - 230V AC/12V DC - Includes AC/DC chargers and quick release strap (T-4A) - Orange	44452

Size and Weight	Battery
19.05 cm; 839g	Lithium-ion

Class I, Div. 2, Grps. A, B, C, D;
Class II, Div. 2, Grps. F, G;
Class III, T-Code: T4

NFPA

Charging rack meets requirements of NFPA 1900-11.1.11.2 (2024) mounted in any position

LANTERN ACCESSORIES

DESCRIPTION	ITEM #	PORTABLE SCENE LIGHT SERIES	LITEBOX SERIES	VULCAN 180	FIRE VULCAN LED
Portable Scene Light Series - Power Supply	22083	√			
Power Supply 230V AC Plug	22075	√			
Power Supply 240V UK AC Plug	22076	√			
230V AC Charge Cord	22086		√		
Battery - Lithium-ion	44351			√	
Battery Replacement	45937		√		
Battery - Lithium-ion	44610				√
Standard System Mounting Rack - Orange	45070		√		


22083


22075


22076


22086


44351


45937


44610


45070

WAYPOINT® 400

IPX8

400,000 cd

Rechargeable, high candela flashlight that illuminates out of reach places

- Far reaching beam
- Integrated stand for hands-free lighting
- Rechargeable in 4 hours



	HIGH	MEDIUM	LOW
LUMENS	1,400	600	38
CANDELA	400,000	165,000	10,000
DISTANCE	1,265m	812m	200m
RUN TIME	3.25 hrs	7.5 hrs	84 hrs

Description	Item #
Waypoint 400 - 230V AC - Includes polymer holder - Yellow	44920
Waypoint 400 - 240V AC - Includes polymer holder - Black	44921

Size and Weight	Battery
17.14 cm; 691g	Lithium-ion



Polymer storage mount (included)

WAYPOINT®

IPX4

High-performance pistol-grip spotlight for down-range illumination

- Long distance, ultra-bright beam
- Integrated stand for hands-free lighting
- 12V DC power cord for unlimited run time



	HIGH	LOW
LUMENS	550	40
CANDELA	100,000	7,900
DISTANCE	625m	178m
RUN TIME	10 hrs	82 hrs

12V DC Power Cord - Unlimited run time
Emergency Signal runs 82 hours

Description	Item #
Waypoint - Includes 12V DC power cord - Yellow	44900
Waypoint - Includes 12V DC power cord - Black	44902

Size and Weight	Battery
17.15 cm; 816g	(4) C batteries (not included)



Polymer storage mount (included)



SUPER SIEGE®

IPX7

Rechargeable lantern provides 360° of bright light that illuminates an entire area

- Easy, large button for turning off and on
- Rechargeable; charges the light as well as portable devices
- Glare Guard™ will shield light from behind for up-close task lighting

1100 LUMENS



WHITE	HIGH	MEDIUM	LOW
LUMENS	1,100	550	125
RUN TIME	5.75 hrs	11.5 hrs	36.25 hrs
SOS	**HIGH**	**SOS**	**LOW**
LUMENS	2.7	2.7	1
RUN TIME	140 hrs	320 hrs	348 hrs

Description	Item #
Super Siege - International AC - Yellow	44946
Super Siege - International AC - Coyote	44948

Size and Weight	Battery
19.05 cm; 867g	Lithium-ion



A small dry storage area is provided in the light's base for all your "keep dry" needs

THE SIEGE®

IPX7

Lantern powerful enough to light up a campsite

- Runs over 30 hours on high and over 12 days on low
- Battery indicator that flashes when low battery
- Three white light settings, a red light for softer light and an SOS mode



WHITE	HIGH	MEDIUM	LOW
LUMENS	540	275	55
RUN TIME	30 hrs	70 hrs	295 hrs

RED	HIGH	SOS
LUMENS	10	10
RUN TIME	235 hrs	430 hrs

Description	Item #
The Siege - Coyote	44931

Size and Weight	Battery
18.42 cm; 878.83g	(3) D Batteries

SIEGE® AA

IPX7

A rugged, compact lantern for when you need a lot of light without taking up a lot of space

- One white LED and two red LEDs
- Five output modes
- Battery indicator that flashes when low battery



Features rugged carry handle and D-rings for hanging





WHITE	HIGH	MEDIUM	LOW
LUMENS	200	100	50
RUN TIME	7 hrs	15.5 hrs	37 hrs

SOS	HIGH	LOW
LUMENS	0.7	0.7
RUN TIME	192 hrs	288 hrs

Description	Item #
Siege AA - Coyote	44941
Siege AA - Yellow with Magnetic Base	44943

Size and Weight	Battery
13.82 cm; 249.47g	(3) AA alkaline batteries

SIEGE ACCESSORIES

DESCRIPTION	ITEM #	SUPER SIEGE	THE SIEGE	SIEGE AA
Glare Guard™	44950	√	√	
Magnetic Accessory Base - Coyote	44942			√
Magnetic Accessory Base - Black	44951	√		
Magnetic Accessory Base - Black	44952		√	
International AC Charge Cord	44919	√		


44950


44942


44951


44952


44919



SURVIVOR® ATEX

HAZ-LO ZONE 0 LIGHTING®

IP66

Right angle, clip-on flashlight popular with firefighters for its slim, low-profile design

- Rubber dome push button switch is designed for easy operation
- Four lighting modes include high, low, flash and mooonlight
- Available in both alkaline and rechargeable models

Description	Item #
Survivor ATEX - 230V AC/12V DC - Orange	90562
Survivor ATEX - 240V AC/12V DC - Orange	90563
Survivor ATEX - Alkaline Model - Orange	90567
Survivor ATEX - Light Only - Orange	90566

Size and Weight	Battery
17.92 cm; Alkaline: 388g // NiMH: 354g	Rechargeable NiMH battery pack or (4) AA alkaline



	HIGH	LOW
LUMENS	175	60
CANDELA	41,000	14,000
DISTANCE	405m	237m
RUN TIME NiMH	3.5 hrs	10 hrs
RUN TIME Alk	8 hrs	20 hrs

Moonlight Mode runs 15 days
Flash runs 5 hours

IEC IECEx
Ex ia op is IIB T3/T4 Ga
Ex ia op is IIC T3/T4 Gb
IECEx FTZU 15.0029X

Ex
II 1G Ex ia op is IIB T3/T4 Ga
II 2G Ex ia op is IIC T3/T4 Gb
FTZU 15ATEX 0046X

SURVIVOR® X ATEX

HAZ-LO ZONE 0 LIGHTING®

IP67

Right angle, lightweight flashlight that accepts both rechargeable lithium-ion battery pack or alkaline batteries

- Rubber dome push button switch is designed for easy operation
- Improved charger design
- Battery life indicator in switch: Green = full charge; Red = running low and Flashing Red = 15 minutes left on battery

	HIGH	LOW
LUMENS	250	60
CANDELA	50,000	14,000
DISTANCE	447m	237m
RUN TIME Lithium	3.75 hrs	15 hrs
RUN TIME Alkaline	5 hrs	15 hrs

Flash runs 8 hours

Description	Item #
Survivor X ATEX - 230V AC/12V DC - Orange	90973
Survivor X ATEX - 240V AC/12V DC - Orange	90974
Survivor X ATEX - Alkaline Model - Orange	90970

Size and Weight	Battery
17.92 cm; Alkaline: 363g // Lithium: 346g	Rechargeable lithium-ion battery pack or (3) AA alkaline





Ex
II 1G Ex ia IIC T3/T4 Ga
II 2D Ex ib IIB T270°C Db
SGS 22ATEX 0081

IEC IECEx
II 1G Ex ia IIIC T3/T4 Ga
II 2D Ex ib IIIB T270°C Db
IECEx BAS22.0045

SURVIVOR PIVOT® ATEX

HAZ-LO ZONE 0 LIGHTING

IP67

Multi-function, dual beam flashlight with 90° articulating head

- Spot beam uses a cool white, high-power LED for maximum distance illumination and flood beam is angled downward for area illumination
- Securely locks into charger with quick release latch for one-handed grab and go
- Translucent switch booth with integrated battery status indicator: Green = full charge; Red = running low and Flashing Red = 15 minutes left on battery



	SPOT		FLOOD		COMBO	
	HIGH	LOW	HIGH	LOW	HIGH	LOW
LUMENS	300	70	300	70	325	80
CANDELA	34,000	8,500	300	75	19,000	5,000
DISTANCE	369m	184m	35m	17m	276m	141m
RUN TIME Lithium	4.25 hrs	16 hrs	4.25 hrs	16 hrs	3.75 hrs	13 hrs
RUN TIME Alkaline	5.5 hrs	15 hrs	5.5 hrs	15 hrs	4.5 hrs	12 hrs

Description	Item #
Survivor Pivot ATEX - 230V AC/12V DC - Orange	91823
Survivor Pivot ATEX - 240V AC/12V DC - Orange	91824
Survivor Pivot ATEX - Alkaline Model - Orange	91820
Survivor Pivot ATEX - Light Only - Orange	91821

IEC IECEx

II 1G Ex ia IIIC T3/T4 Ga
II 2D Ex ib IIIB T270°C Db
IECEx BAS22.0045

Size and Weight	Battery
20.14 cm; Lithium-ion: 459g // Alkaline: 473g Lithium-ion: 499g // Alkaline: 513g W/MAGNET	Rechargeable lithium-ion battery pack or (3) AA alkaline

SURVIVOR ACCESSORIES

DESCRIPTION	ITEM #	SURVIVOR ATEX	SURVIVOR X ATEX	SURVIVOR PIVOT ATEX
Smart Charger	90354	√		
Lithium-ion Battery	90316	√		
Lithium-ion Battery	90341		√	
NiMH Battery	90339	√		
DC1 Charge Cord (Rechargeables)	22051	√	√	√
230V AC Charge Cord	22061	√	√	√

Notice: The Survivor X is not compatible with legacy Survivor chargers; however, the new charger WILL charge both Streamlight's Legacy Survivors as well as the new Survivor X.


90354


90316, 90341


90339


22051


22061

VANTAGE® II

IPX7

Compact, low-profile helmet light designed to easily attach to Slotted Industrial Hard Hat mounts

- Shock-proof and virtually indestructible with safety feature - blue taillight LED so you can be scene from behind
- Large push-button switch for easy on/off, even with gloves
- Swivel clamp to optimize beam location

	HIGH	LOW
LUMENS	350	135
CANDELA	3,500	1,700
DISTANCE	118m	80m
RUN TIME	2.25 hrs	5 hrs











Description	Item #
Vantage II - Includes industrial hard hat and (1) CR123A battery	69333

Size and Weight	Battery
6.02 cm; 84.2g with Industrial Mount	(1) CR123A lithium

NFPA
Flashlight meets 500°F requirements of NFPA 1971-8.6 (2018)

VANTAGE® 180 X USB

IPX7

Rechargeable, multi-fuel, right angle flashlight

- Versatile - three lights in one - wear it, hold it or clip it (even hang it)
- Head articulates 180° to aim the beam where you need it
- Easily attaches to both traditional and modern style helmets with no tools necessary

	HIGH	LOW
LUMENS	250	100
CANDELA	7,200	2,650
DISTANCE	170m	103m
RUN TIME	5 hrs	15 hrs

NFPA
Flashlight meets 500°F requirements of NFPA 1971-8.6 (2018)





Description	Item #
Vantage 180 X USB - Includes SL-B26 battery pack and helmet bracket	88911

Size and Weight	Battery
13.2 cm; SL-B26: 167g // CR123A: 156g	(1) SL-B26 battery pack or (2) CR123A lithium



DUALIE® 3AA ATEX

HAZ-LO ZONE 0 LIGHTING®

IP67

Features two LEDs and three lighting modes: spot, flood, spot and flood combo

- ATEX-rated for Zone 0 locations
- Durable, corrosion-proof polymer resin
- Dual head switches on either side of the body for easy beam selection and one-handed operation

	SPOT	FLOOD	COMBO
LUMENS	140	140	245
CANDELA	7,300	80	---
DISTANCE	171m	8m	---
RUN TIME	18 hrs	18 hrs	9 hrs



Description	ITEM #
Dualie 3AA ATEX - Includes (3) AA alkaline batteries - Clam - Orange	68755

Size and Weight	Battery
17.78 cm; 193g	(3) AA alkaline

II 1G Ex ia op is IIC T3/T4 Ga
FTZU 15ATEX 0221X

II 1G Ex ia op is IIC T3/T4 Ga
IECEx FTZU 160017X

DUALIE® 3AA ATEX LASER

HAZ-LO ZONE 0 LIGHTING®

IP67

Intrinsically safe flashlight featuring a red laser pointer

- ATEX-rated for Zone 0 locations
- Durable, corrosion-proof polymer resin
- Dual head switches on either side of the body for easy beam selection and one-handed operation

	SPOT	COMBO
LUMENS	150	<5W output
CANDELA	7,700	---
DISTANCE	175m	---
RUN TIME	17 hrs	70 hrs



Description	ITEM #
Dualie 3AA ATEX Laser - Includes (3) AA alkaline batteries - Clam - Orange	68765

Size and Weight	Battery
17.78 cm; 193g	(3) AA alkaline

II 1G Ex ia op is IIC T3/T4 Ga
FTZU 15ATEX 0221X

II 1G Ex ia op is IIC T3/T4 Ga
IECEx FTZU 160017X

DUALIE® RECHARGEABLE

HAZ-LO DIVISION 1 LIGHTING

IP67

Rechargeable, multi-function flashlight

- Mount virtually anywhere with charge holder
- Rechargeable dual beam flashlight; recharges in 8 hours

	SPOT	FLOOD	COMBO
LUMENS	180	105	275
CANDELA	11,500	60	--
DISTANCE	171m	18m	--
RUN TIME	7.25 hrs	13.5 hrs	5.5 hrs



Description	ITEM #
Dualie Rechargeable Magnet - 230V AC - C1D1 - Yellow	68797

Size and Weight	Battery
19.05 cm; 201g	Lithium-ion

SGS c US

Class I, II, Div. I, Grps. A, B, C, D, E, F, G Class III, T-Code: T4

DUALIE® 2AA ATEX

HAZ-LO ZONE 0 LIGHTING

IPX4

Safety-rated for Zone 0 environments with magnet, dual beam flashlight

- Spot and flood LED options
- Integrated magnet for hands-free use



Ex II 1G Ex ia op is IIC T3/T4 Ga FTZU 16ATEX 0120X

IEC IECEx Ex ia op is IIC T3/T4 Ga IECEx FTZU 16.0022X

	SPOT	FLOOD	COMBO
LUMENS	115	115	175
CANDELA	3,100	75	---
DISTANCE	111m	17m	---
RUN TIME	24 hrs	24 hrs	15 hrs

Description	ITEM #
Dualie 2AA ATEX - Includes (2) AA alkaline batteries - Orange	67754

Size and Weight	Battery
15.5 cm; 111g	(2) AA alkaline

DUALIE® 2AA

HAZ-LO DIVISION 1 LIGHTING

IPX4

Dual beam, compact, C1D1, battery operated flashlight

- Spot and flood LED options
- Integrated magnet for hands-free use



SGS c US

Class I, II, Div. 1, Grps. A, B, C, D, E, F, G; Class III, T-Code: T4

	SPOT	FLOOD	COMBO
LUMENS	115	115	175
CANDELA	3,100	75	---
DISTANCE	111m	17m	---
RUN TIME	24 hrs	24 hrs	15 hrs

Description	ITEM #
Dualie 2AA - Includes (2) AA alkaline batteries - Yellow	67751

Size and Weight	Battery
15.5 cm; 111g	(2) AA alkaline



DUALIE® 3AA COLOR-RITE® // DUALIE® 3AA COLOR-RITE® ATEX

HAZ-LO DIVISION 1 LIGHTING

HAZ-LO ZONE 0 LIGHTING

IP67

Multi-function AA flashlight with Color-Rite Technology®

- Flood beam uses a high CRI LED for true color recognition
- Produces a soft, wide beam to illuminate your work area
- ATEX is for Zone 0 environments

	SPOT (COOL WHITE)	FLOOD (WARM WHITE)	COMBO
LUMENS	225	175	320
CANDELA	8,000	380	7,000
DISTANCE	179m	39m	167m
RUN TIME	8 hrs	8.5 hrs	5 hrs

Color Temperature: 4,000k



Color-Rite®

Description	ITEM #
Dualie 3AA Color-Rite ATEX - Includes (3) AA alkaline batteries - Orange	68915
Dualie 3AA Color-Rite C1D1 - Includes (3) AA alkaline batteries - Yellow	68910

Size and Weight	Battery
17.78 cm; 187g	(3) AA alkaline

Dualie 3AA Color-Rite C1D1

SGS c us

Class I, II, Div. I,
Grps. A, B, C, D, E, F, G
Class III, T-Code: T4

Dualie 3AA Color-Rite ATEX

Ex

II 1G Ex ia op is IIC T3/T4 Ga
FTZU 15ATEX 0221X

IEC IECEx

Ex ia op is IIC T3/T4 Ga
IECEx FTZU 16.0017X



2AAA PROPOLYMER® HAZ-LO® ATEX

HAZ-LO ZONE 0 LIGHTING®

IPX4

Alkaline battery operated, handheld, Zone 0 flashlight

- Optional rubber helmet strap accessory for hands-free use
- Perfect choice for when you don't need a large light and still want a bright light that runs long
- Fits well in your hand or in your pocket

LUMENS	60
CANDELA	800
DISTANCE	57m
RUN TIME	16 hrs



Description	ITEM #
2AAA ProPolymer HAZ-LO ATEX - Includes (2) AAA alkaline batteries - Box - Orange	66507

Size and Weight	Battery
13.7 cm; 54g	(2) AAA alkaline

II 1G Ex ia IIC T4 Ga
FTZU 16 ATEX 0057X

Ex ia IIC T4 Ga
IECEx FTZU 16.0016X

4AA PROPOLYMER® LED

HAZ-LO DIVISION 1 LIGHTING®

IP65

Handheld flashlight with seven LEDs, perfect for up close work

- Produced soft, diffused light
- Unbreakable, scratch-resistant lens

LUMENS	67
RUN TIME	155 hrs



Description	ITEM #
4AA LED - batteries not included - Box - Yellow	68200
4AA LED - batteries not included - Box - Black	68300

Size and Weight	Battery
16.51 cm; 178.6g	(4) AA alkaline

c UL LISTED
Class I, Div. 2, Grps. A, B, C, D;
Class II, Div. 2, Grps. F, G;
Class III, T-Code: T3C

UL LISTED
Class I, Div. 1, Grps. C, D;
Class I, Div. 2, Grps. A, B, C, D;
Class II, Div. 2, Grps. F, G;
Class III, T-Code: T3C

MSHA
Permissible Flashlight
App. No. 10C-658-0
Tested for use in methane-air mixtures only

2AA PROPOLYMER® HAZ-LO®

IP67

Virtually indestructible safety-rated flashlight

- Long run time
- Provides a focused beam with optimum peripheral illumination
- Fits in your pocket or strap it to a helmet

LUMENS	65
CANDELA	2,300
DISTANCE	96m
RUN TIME	24 hrs



Description	ITEM #
2AA ProPolymer HAZ-LO - Includes (2) AA alkaline batteries - Clam - Yellow	67101

Size and Weight	Battery
16.26 cm; 100g	(2) AA alkaline

Class I, II, Div. 1, Grps. A, B, C, D, E, F, G; Class III; T-Class: T4

Permissible Flashlight. Approval No. 20-A140002-0. Tested for Intrinsic Safety in Methane-Air mixtures only.

2AA PROPOLYMER® HAZ-LO® ATEX

IPX4

General purpose, handheld, Zone 0 flashlight

- Optional rubber helmet strap accessory for hands-free use
- Super tough nylon housing
- Fits in your pocket

LUMENS	65
CANDELA	2,300
DISTANCE	96m
RUN TIME	24 hrs



Description	ITEM #
2AA ProPolymer HAZ-LO ATEX - Includes (2) AA alkaline batteries - Clam - Orange	67555

Size and Weight	Battery
16.26 cm; 100g	(2) AA alkaline

II 1G Ex ia IIC T3/T4 Ga
BASEEFA 14ATEX0072

Ex ia IIC T3/T4 Ga
IECEx BAS 14.0034

DUALIE/PROPOLYMER ACCESSORIES

DESCRIPTION	ITEM #	2AA PROPOLYMER HAZ-LO	DUALIE RECHARGEABLE
Safety Wand - Red	74903	√	
Safety Wand - Yellow	74904	√	
DC1 Charge Cord (Rechargeables)	22080		√



74903, 74904



22080

LIGHT ONLY

COMPACT & FULL FRAME PISTOLS

UNIVERSAL RAIL MOUNT MODELS


TLR-1 HL®

NEW

TLR-1 HL®-X


TLR-1® // TLR-1®s


TLR-3®


TLR-7® X


TLR-7® X CONTOUR REMOTE


TLR-7® HL-X


TLR-9®

SUBCOMPACT & COMPACT PISTOLS

TRIGGER GUARD & RAIL MOUNT MODELS


TLR-3®


TLR-6® NON-LASER


TLR-7® X


TLR-7® HL-X


TLR-7® X SUB

NEW

TLR-7® HL-X SUB

LONG GUN/AR

SHOTGUN FOREND & RAIL MOUNT MODELS


TL-RACKER®


TLR® RM 1

NEW

TLR® RM 1 HL-X


TLR® RM 2


PROTAC® RAIL MOUNT 1


PROTAC® RAIL MOUNT 2


PROTAC® RAIL MOUNT HL-X


PROTAC® RAIL MOUNT HL-X PRO

NEW

PROTAC® RAIL MOUNT HP-X PRO


PROTAC® 2.0 RAIL MOUNT

NEW

PROTAC® 2.0 RAIL MOUNT HP


TLR-1 HL® (Long Gun Kit)

LIGHT/LASER COMBO

COMPACT & FULL FRAME PISTOLS

UNIVERSAL RAIL MOUNT MODELS


TLR-2® // TLR-2®s


TLR-2 HL®


TLR-2® G // TLR-2 HL® G

NEW


TLR-8® X

NEW


TLR-8® X G


TLR-10®

SUBCOMPACT & COMPACT PISTOLS

TRIGGER GUARD & RAIL MOUNT MODELS


TLR-6®


TLR-6 HL® //
TLR-6 HL® G

NEW


TLR-8® X //
TLR-8® X G

NEW


TLR-8® X SUB //
TLR-8® X G SUB

NEW


TLR-8® HL-X //
TLR-8® HL-X G

NEW


TLR-8® HL-X SUB //
TLR-8® HL-X G SUB

LONG GUN/AR

RAIL MOUNT MODELS


TLR-2® // TLR-2®s


TLR-2 HL®


TLR-2 HL® G


TLR® RM 1 LASER
RED//GREEN


TLR® RM 2 LASER
RED//GREEN


PROTAC® RAIL MOUNT
HL-X LASER

It can be difficult to choose the right weapon-mounted light for your specific gun and application. We want to make the process easier. That's why we designed the TLR Fit Guide to make it easy for you to select the right light for your weapon.

SCAN OR CLICK THE QR CODE TO VIEW OUR TLR FIT GUIDE

TLR-1 HL®

WHITE LIGHT ILLUMINATOR

IPX7

Provides for maximum illumination with a wide beam pattern that lights up large areas so you can identify what is nearby

- Wide peripheral beam
- Strobe for signaling
- Unbreakable, scratch-resistant, gasket sealed lens

LUMENS	1,000
CANDELA	20,000
DISTANCE	283m
RUN TIME	1.5 hrs



1000 LUMENS



TLR-1 HL Long Gun Kit

Description	ITEM #
TLR-1 HL - Includes Rail Locating Keys for use with Glock® style, 1913 Picatinny, S&W 99/TSW, SIG P320 and Beretta® 90TWO - lithium batteries - Black	69260
TLR-1 HL - Long Gun Kit - Includes safe off remote door switch, remote pressure switch, mounting clips, standard door switch – lithium batteries - Box - Black	69262

Size and Weight	Battery
8.61 cm; 122.47g	(2) CR123A lithium

TLR-1® // TLR-1®s

WHITE LIGHT ILLUMINATOR

IPX7

Durable gun light that produces a concentrated beam with optimum peripheral illumination

- Available in standard or strobe
- Mounts directly to handguns with GLOCK® style rails and all MID-STD-1913 (Picanny) rails

LUMENS	300
CANDELA	12,000
DISTANCE	219m
RUN TIME	2.5 hrs





Description	ITEM #
TLR-1 – Includes Rail Locating Keys for use with GLOCK® style, 1913 Picatinny, S&W 99/TSW, SIG P320 and Beretta® 90TWO and lithium batteries - Black	69110
TLR-1s – Includes Rail Locating Keys for use with GLOCK® style, 1913 Picatinny, S&W 99/TSW, SIG P320 and Beretta® 90TWO and lithium batteries - Black	69210

Size and Weight	Battery
8.61 cm; 118.6g	(2) CR123A lithium



TLR-1 HL®-X

THE TLR-1 HL GOES RECHARGEABLE

NEW

TLR-1 HL®-X

IPX7

WHITE LIGHT ILLUMINATOR

Multi-fuel, high-lumen, rail-mounted light with front loading batteries

- Wide peripheral beam pattern gives you a powerful 1,500 lumen light
- Extended high and high rear paddle switches to suit your shooting style
- Rapid battery replacement without removing the light from your firearm
- Recharges in 2.5 hours



1500 LUMENS

	SL-B9	CR123A
LUMENS	1,500	1,000
CANDELA	20,000	15,000
DISTANCE	283m	245m
RUN TIME	1 hr	1.5 hrs

Description	ITEM #
TLR-1 HL-X USB – Includes rail locating keys, (2) SL-B9 battery packs, & USB-C cord – Black	69501

Size and Weight	Battery
8.75 cm; SL-B9: 147g // CR123A: 140g	(2) SL-B9 battery packs or (2) CR123A lithium



No need to remove from gun to replace the batteries

TLR-2 HL®

WHITE LIGHT ILLUMINATOR / **RED LASER**

IPX4

Super bright, 1000-lumen gun light with red aiming laser

- Wide peripheral beam featuring a 640-660nm red laser
- Unbreakable, scratch-resistant, gasket sealed lens
- Easy, fast battery installation/replacement

LUMENS	1,000
CANDELA	20,000
DISTANCE	283m
RUN TIME	1.5 hrs

Laser mode runs 45 hours

Description	ITEM #
TLR-2 HL - Includes Rail Locating Keys for use with GLOCK® style, 1913 Picatinny, S&W 99 TSW, SIG P320 and Beretta® 90TWO and lithium batteries - Black	69261

Size and Weight	Battery
8.61 cm; 138.5g	(2) CR123A lithium

1000 LUMENS



TLR-2 HL® G

WHITE LIGHT ILLUMINATOR / **GREEN LASER**

IPX4

Super bright, 1000-lumen gun light with green aiming laser

- Wide peripheral beam featuring a 510-530nm green laser
- Unbreakable, scratch-resistant, gasket sealed lens
- Easy, fast battery installation/replacement

LUMENS	1,000
CANDELA	20,000
DISTANCE	283m
RUN TIME	1.5 hrs

Laser mode runs 17 hours

Description	ITEM #
TLR-2 HL G - Includes Rail Locating Keys for use with GLOCK® style, 1913 Picatinny, S&W 99 TSW, SIG P320 and Beretta® 90TWO and lithium batteries - Black	69265

Size and Weight	Battery
8.61 cm; 138.5g	(2) CR123A lithium

1000 LUMENS



TLR-2® G

WHITE LIGHT ILLUMINATOR / **GREEN LASER**

IPX4

Rail-mounted light with integrated green aiming laser that's visible even in daylight

- Highly visible beam featuring a 510-530nm green laser
- Strobe light with option to be disabled
- Mounts directly to handguns with GLOCK® style rails and all MIL-STD-1913 (Picanny) rails

LUMENS	300
CANDELA	12,000
DISTANCE	283m
RUN TIME	2.5 hrs

Laser mode runs 17 hours

Description	ITEM #
TLR-2 G - Includes Rail Locating Keys for use with GLOCK® style, 1913 Picatinny, S&W 99 TSW, SIG P320 and Beretta® 90TWO and lithium batteries - Black	69250

Size and Weight	Battery
8.61 cm; 133.8g	(2) CR123A lithium



TLR-3®

WHITE LIGHT ILLUMINATOR

IPX7

Lightweight gun light designed for sub-compact and compact weapons

- Rail clamp designed to rapidly attach/detach from side of weapon; one-handed snap-on and tighten interface keeps hands away from muzzle
- Impact-resistant polymer construction with durable anodized aluminum facecap
- Operates in extreme temperatures

LUMENS	170
CANDELA	3,300
DISTANCE	115m
RUN TIME	1.5 hrs



Description	ITEM #
TLR-3 - Includes Rail Locating Keys and CR2 lithium battery - Box - Black	69220

Size and Weight	Battery
6.88 cm; 65.77g	(1) CR2 lithium

TLR-6®

WHITE LIGHT ILLUMINATOR / RED LASER

IPX4

Designed to securely attach to a variety of subcompact handguns; features 640-660nm red laser

- Tool-less battery replacement without removal from the weapon or the need to re-sight the laser
- Ambidextrous push-button switches on either side for easy operation
- Designed to securely attach to the trigger guard on hand guns
- Models available without laser

LUMENS	100
CANDELA	2,000
DISTANCE	89m
RUN TIME	1 hr

Laser mode runs 11 hours



Description	ITEM #
TLR-6 (GLOCK® 42/43) White LED and Red Laser – Includes (2) CR 1/3N lithium batteries - Black	69270
TLR-6 (GLOCK® 26/27/33) White LED and Red Laser – Includes (2) CR 1/3N lithium batteries - Black	69272
TLR-6 (SIG SAUER® P365) White LED and Red Laser – Includes (2) CR 1/3N lithium batteries - Black	69284
TLR-6 (GLOCK® 43X/48 MOS) White LED and Red Laser – Includes (2) CR 1/3N lithium batteries - Black	69286
TLR-6 (SA Hellcat®) White LED and Red Laser – Includes (2) CR 1/3N lithium batteries - Black	69287
NON-LASER MODELS	
TLR-6 (GLOCK® 42/43) Without Laser – White LED - Includes (2) CR 1/3N lithium batteries - Black	69280
TLR-6 (GLOCK® 26/27/33) Without Laser –White LED - Includes (2) CR 1/3N lithium batteries - Black	69282

All Rights Reserved. M&P Shield™, GLOCK®, SIG SAUER®, Springfield Armory®, KIMBER®, Colt®, Ruger®, & KAHR® are registered trademarks of Smith & Wesson, GLOCK, Inc., SIG SAUER, Springfield Inc., Colt, Ruger, KIMBER, IP LLC & Saeilo Enterprises, Inc. Streamlight has not sought endorsement of this product from Smith & Wesson®, GLOCK®, Springfield Inc., SIG SAUER®, KIMBER®, KAHR® Arms or Saeilo Enterprises, Inc.

Size and Weight	Battery
5.84 cm; 36g *Size & Weight vary by model*	(2) CR-1/3 N lithium

TLR-6 HL®

WHITE LIGHT ILLUMINATOR / RED LASER OR GREEN LASER

IPX4

Ultra-compact weapon light with a high-power LED and integrated aiming laser features a rechargeable battery system powering 300 lumens of bright lightn

- Designed to securely attach to multiple variations of weapons
- Includes three easy-to-swap batteries to triple your run time
- Portable charging case conveniently stores and charges batteries without the need to tether your gun



LUMENS	300
CANDELA	4,250
DISTANCE	130m
RUN TIME	20 min

Red laser runs 9 hours
Green laser runs 5 hours

Description	ITEM #
TLR-6 HL (GLOCK® 42/43) White LED and Red Laser – Includes (3) SL-B2 batteries and charger - Black	69340
TLR-6 HL (GLOCK® 42/43) White LED and Red Laser – Includes (3) SL-B2 batteries and charger - Flat Dark Earth	69341
TLR-6 HL (M&P® Sheild™ 40/9) White LED and Red Laser – Includes (3) SL-B2 batteries and charger - Black	69342
TLR-6 HL (GLOCK® Rail Mount) White LED and Red Laser – Includes (3) SL-B2 batteries and charger - Black	69343
TLR-6 HL (SIG SAUER® P365/XL) White LED and Red Laser – Includes (3) SL-B2 batteries and charger - Black	69344
TLR-6 HL G (GLOCK® 42/43) White LED and Green Laser – Includes (3) SL-B2 batteries and charger - Black	69350
TLR-6 HL G (GLOCK® 42/43) White LED and Green Laser – Includes (3) SL-B2 batteries and charger - Flat Dark Earth	69351
TLR-6 HL G (M&P® Sheild™ 40/9) White LED and Green Laser – Includes (3) SL-B2 batteries and charger - Black	69352
TLR-6 HL G (GLOCK® Rail Mount) White LED and Green Laser – Includes (3) SL-B2 batteries and charger - Black	69353
TLR-6 HL G (SIG SAUER® P365®) White LED / Green Laser – Includes (3) SL-B2 batteries and charger – Black	69354

All Rights Reserved. M&P Shield™, GLOCK®, SIG SAUER® are registered trademarks of Smith & Wesson, GLOCK, Inc., SIG SAUER®, & Saeilo Enterprises, Inc. Streamlight has not sought endorsement of this product from Smith & Wesson®, GLOCK®

Size and Weight	Battery
6.35 cm; 32g *Size & Weight vary by model*	(1) SL-B2 battery





TLR-7® X Contour Remote

Low-Profile, Rail-Mounted Tactical Light with Integrated Contour Remote Switch

TLR-7® X CONTOUR REMOTE

WHITE LIGHT ILLUMINATOR

IPX7

Designed for one-handed shooting – ideal for dog handlers, SWAT teams, door breaching and close-quarter operations

- Rail grip clamp system securely attaches/detaches quickly and safely with no tools and without putting your hands in front of muzzle
- Ambidextrous rear on/off switch; pressure-controlled grip switch provides momentary operation
- Cannot be retrofitted with existing TLR-7 X products

LUMENS	500
CANDELA	5,000
DISTANCE	140m
RUN TIME SL-B9	1 hr
RUN TIME CR123A	1.5 hrs

Description	ITEM #
TLR-7 X Contour Remote - for GLOCK® GEN 4 or GEN 5 models - Includes CR123A lithium battery - Black	69428

Size and Weight	Battery
11.68 cm; 76.3g	(1) CR123A lithium battery



Safe Off feature prevents accidental activation; saves batteries

NEW

TLR-7® HL-X

WHITE LIGHT ILLUMINATOR / RED LASER

IPX7

Rechargeable, high lumen, multi-fuel tactical light

- Facecap engineered to produce a longer reaching, tighter beam
- Includes rear paddle switches to accommodate your shooting style
- User-programmable output modes

Description	ITEM #
TLR-7 HL-X USB – Includes high switch mounted on light plus low switch in package, SL-B9 rechargeable battery pack and key kit - Black	69458

Size and Weight	Battery
7.37 cm; SL-B9: 81.6g // CR123A: 79.4g	(1) SL-B9 battery pack or CR123A lithium battery

SL-B9	DEFAULT	PROGRAMMABLE
LUMENS	1,000	500
CANDELA	22,000	11,000
DISTANCE	297m	210m
RUN TIME	30 min	1 hr

CR123A	
LUMENS	500
CANDELA	11,000
DISTANCE	210m
RUN TIME	1.5 hrs

Laser mode runs 29 hours

1000 LUMENS



Safe Off feature prevents accidental activation; saves batteries



NEW

TLR-8® HL-X

WHITE LIGHT ILLUMINATOR / RED LASER

IPX4

Rechargeable, high-lumen, multi-fuel tactical light

- Facecap engineered to produce a longer reaching, tighter beam
- Includes rear paddle switches to accommodate your shooting style
- User-programmable output modes

Description	ITEM #
TLR-8 HL-X USB – Includes mounting kit with key, multi-tool, (1) SL-B9 Li-ion rechargeable battery pack and USB-C cord - Black	69465

Size and Weight	Battery
7.37 cm; SL-B9: 89g // CR123A: 86.2g	(1) SL-B9 battery or (1) CR123A lithium battery

SL-B9	DEFAULT	PROGRAMMABLE
LUMENS	1,000	500
CANDELA	22,000	11,000
DISTANCE	297m	210m
RUN TIME	30 min	1 hr

CR123A	
LUMENS	500
CANDELA	11,000
DISTANCE	210m
RUN TIME	1.5 hrs

Laser mode runs 29 hours

1000 LUMENS



Safe Off feature prevents accidental activation; saves batteries

NEW

TLR-7® HL-X SUB

WHITE LIGHT ILLUMINATOR

IPX7

Multi-fuel, bright tactical light

- Features a specialized clamp system
- Includes high and low paddle switches to match your shooting style

Description	ITEM #
TLR-7 HL-X sub USB (GLOCK® 43X/48 MOS | 43X/48 Rail) - Includes mounting kit with key, multi-tool and (1) SL-B9 Li-ion rechargeable battery pack and USB-C cord - Black	69503
TLR-7 HL-X sub USB (SIG SAUER® P365®/XL closed rail systems*) - Includes mounting kit with key, multi-tool and (1) SL-B9 Li-ion rechargeable battery pack and USB-C cord - Black *Does not fit the P365® XMACRO	69504

Size and Weight	Battery
6.38 cm; SL-B9: 70.6g // CR123A: 67.8g	(1) SL-B9 battery or (1) CR123A lithium battery

SL-B9	DEFAULT	PROGRAMMABLE
LUMENS	1,000	500
CANDELA	10,000	5,000
DISTANCE	200m	141m
RUN TIME	30 min	1 hr

CR123A	
LUMENS	500
CANDELA	5,000
DISTANCE	141m
RUN TIME	1.5 hrs

1000 LUMENS



Safe Off feature prevents accidental activation; saves batteries

NEW

TLR-8® HL-X SUB

WHITE LIGHT ILLUMINATOR / RED LASER

IPX4

Multi-fuel, bright tactical light

- Features a specialized clamp system
- Includes high and low paddle switches to match your shooting style

Description	ITEM #
TLR-8 HL-X sub USB (GLOCK® 43X/48 MOS | 43X/48 Rail) - Includes mounting kit with key, multi-tool, (1) SL-B9 rechargeable battery pack and USB-C cord - Black	69466

Size and Weight	Battery
6.55 cm; 77.7g	(1) SL-B9 battery or (1) CR123A lithium battery

SL-B9	DEFAULT	PROGRAMMABLE
LUMENS	1,000	500
CANDELA	10,000	5,000
DISTANCE	200m	141m
RUN TIME	30 min	1 hr

CR123A	
LUMENS	500
CANDELA	5,000
DISTANCE	141m
RUN TIME	1.5 hrs

1000 LUMENS



Safe Off feature prevents accidental activation; saves batteries

NEW

TLR-8® HL-X G SUB

WHITE LIGHT ILLUMINATOR / GREEN LASER

IPX4

Multi-fuel, bright tactical light

- Features a specialized clamp system
- Includes high and low paddle switches to match your shooting style

Description	ITEM #
TLR-8 HL-X G sub USB (GLOCK® 43X/48 MOS | 43X/48 Rail) - Includes mounting kit with key, multi-tool, (1) SL-B9 rechargeable battery pack and USB-C cord - Black	69476

Size and Weight	Battery
6.55 cm; 77.7g	(1) SL-B9 battery or (1) CR123A lithium battery

SL-B9	DEFAULT	PROGRAMMABLE
LUMENS	1,000	500
CANDELA	10,000	5,000
DISTANCE	200m	141m
RUN TIME	30 min	1 hr

CR123A	
LUMENS	500
CANDELA	5,000
DISTANCE	141m
RUN TIME	1.5 hrs

1000 LUMENS



Safe Off feature prevents accidental activation; saves batteries



TLR-7® X

WHITE LIGHT ILLUMINATOR

IPX7

Multi-fuel rail-mounted light

- User-interchangeable paddle switches to accommodate your shooting style
- Accepts either SL-B9 or CR123A batteries

LUMENS	500
CANDELA	5,000
DISTANCE	140m
RUN TIME SL-B9	1 hr
RUN TIME CR123A	1.5 hrs

Description	ITEM #
TLR-7 X - Includes high switch mounted on light plus low switch in package, lithium battery and key kit - Black	69424

Size and Weight	Battery
6.55 cm; SL-B9: 74.8g // CR123A: 70.3g	(1) SL-B9 battery or (1) CR123A lithium battery



Safe Off feature prevents accidental activation; saves batteries

TLR-7® X SUB

WHITE LIGHT ILLUMINATOR

IPX7

Multi-fuel weapon light for subcompact handguns

- Ultra-compact and lightweight
- Fits on select railed subcompact pistols
- Includes interchangeable paddle switches

LUMENS	500
CANDELA	5,000
DISTANCE	141m
RUN TIME	1.5 hrs

Description	ITEM #
TLR-7 X sub (for GLOCK® 43X/48 MOS | 43X/48 Rail Models Only) - Includes mounting kit with key and CR123A lithium battery - Black	69400
TLR-7 X sub (for SIG SAUER® P365/XL Closed Rail System) - Includes mounting kit with key and CR123A lithium battery - Black	69401
TLR-7 X sub (for 1913 short models) - Includes mounting kit with key and CR123A lithium battery - Black	69402

Size and Weight	Battery
12.95 cm; 67.8g	(1) CR123A lithium battery



Safe Off feature prevents accidental activation; saves batteries

NEW

TLR-8® X

WHITE LIGHT ILLUMINATOR / RED LASER

IPX4

Compact, multi-fuel rail-mounted light with red laser

- Features integrated 640-660nm red laser
- Includes interchangeable paddle switches



LUMENS	500
CANDELA	5,000
DISTANCE	140m
RUN TIME SL-B9	1 hr
RUN TIME CR123A	1.5 hrs

Laser mode runs 60 hours

Description	ITEM #
TLR-8 X – Includes high switch mounted on light plus low switch in package, lithium battery and key kit - Black	69414

Size and Weight	Battery
6.55 cm; CR123A: 75g // SL-B9: 77.7g	(1) SL-B9 battery pack or (1) CR123A lithium

NEW

TLR-8® X G

WHITE LIGHT ILLUMINATOR / GREEN LASER

IPX4

Compact, multi-fuel rail-mounted light with green laser

- Features integrated 510-530nm green laser
- Includes interchangeable paddle switches



LUMENS	500
CANDELA	5,000
DISTANCE	140m
RUN TIME SL-B9	1 hr
RUN TIME CR123A	1.5 hrs

Laser mode runs 11 hours

Description	ITEM #
TLR-8 X G – Includes high switch mounted on light plus low switch in package, lithium battery and key kit - Black	69434

Size and Weight	Battery
6.55 cm; CR123A: 75g // SL-B9: 77.7g	(1) SL-B9 battery pack or (1) CR123A lithium

NEW

TLR-8® X SUB RAIL MOUNTED GUNS

WHITE LIGHT ILLUMINATOR / RED LASER

IPX4

Multi-fuel, gun light with red laser designed to fit select railed subcompact pistols

- Features integrated 640-660nm red laser
- Includes interchangeable rear paddle switches



LUMENS	500
CANDELA	5,000
DISTANCE	140m
RUN TIME SL-B9	1 hr
RUN TIME CR123A	1.5 hrs

Laser mode runs 60 hours

Description	ITEM #
TLR-8 X sub – (for GLOCK® 43X/48 MOS | 43X/48 Rail models only) - Includes mounting kit with key and CR123A lithium battery - Black	69411

Size and Weight	Battery
6.38 cm; CR123A: 78.53g // SL-B9: 81.4g	(1) SL-B9 battery pack or (1) CR123A lithium

NEW

TLR-8® X G SUB RAIL MOUNTED GUNS

WHITE LIGHT ILLUMINATOR / GREEN LASER

IPX4

Multi-fuel, gun light with green laser designed to fit select railed subcompact pistols

- Features integrated 510-530nm green laser
- Includes interchangeable paddle switches



LUMENS	500
CANDELA	5,000
DISTANCE	140m
RUN TIME SL-B9	1 hr
RUN TIME CR123A	1.5 hrs

Laser mode runs 11 hours

Description	ITEM #
TLR-8 X G sub – (for GLOCK® 43X/48 MOS | 43X/48 Rail models only) - Includes mounting kit with key and CR123A lithium battery - Black	69431

Size and Weight	Battery
6.38 cm; CR123A: 78.53g // SL-B9: 81.4g	(1) SL-B9 battery pack or (1) CR123A lithium

TLR-9®

WHITE LIGHT ILLUMINATOR

IPX7

Slim designed, rail-mounted light that rapidly attach/detaches from full frame weapons

- Features a rail clamp
- Fits on select railed subcompact pistols
- Includes interchangeable rear paddle switches

LUMENS	1,000
CANDELA	10,000
DISTANCE	200m
RUN TIME	1.5 hrs

Strobe runs 3 hours

Description	ITEM #
TLR-9 - Includes rail locating keys and (2) CR123A lithium batteries with high/low switches - Black	69464
TLR-7 X/TLR-8 X/TLR-9/TLR-10 Key Kit	69177

Size and Weight	Battery
9.82 cm; 120.9g	(2) CR123A lithium



Safe Off feature prevents accidental activation; saves batteries

TLR-10®

WHITE LIGHT ILLUMINATOR / **RED LASER**

IPX4

Rail-mounted light with red laser that rapidly attach/detaches from full frame weapons

- Features integrated 640-660nm red laser
- Fits on select railed subcompact pistols
- Includes interchangeable rear paddle switches

LUMENS	1,000
CANDELA	10,000
DISTANCE	200m
RUN TIME	1.5 hrs

Strobe runs 60 hours

Description	ITEM #
TLR-10 - Includes rail locating keys and (2) CR123A lithium batteries with high/low switches - Black	69470
TLR-7 X/TLR-8 X/TLR-9/TLR-10 Key Kit	69177

Size and Weight	Battery
9.82 cm; 131g	(2) CR123A lithium



Safe Off feature prevents accidental activation; saves batteries





TL-RACKER®

IPX7

All-in-one integrated shotgun forend light that reduces snag by eliminating the need for remote cords

- Ideal for shotgun breaching and close-quarter operations
- Ease of access with momentary and constant on modes
- Elongated switch pad accommodates virtually any hand size

LUMENS	1,000
CANDELA	20,000
DISTANCE	283m
RUN TIME	1.5 hrs





Description	ITEM #
TL-Racker - Mossberg 500/590 - lithium batteries - Black	69600

Size and Weight	Battery
20.32 cm; 343g	(2) CR123A lithium

TLR® RM 1

IPX7

Low-profile long gun light featuring a longer reaching, tighter beam

- Designed to provide increased candela while maintaining lumen output
- Independently operating push-button and remote pressure switches
- System is packaged as a kit




Safe Off feature prevents accidental activation; saves batteries

LUMENS	500
CANDELA	11,000
DISTANCE	210m
RUN TIME	1.5 hrs

Strobe runs 3 hours



11,000 cd



HIGH CANDELA
BEAM PATTERN



Optional M-LOK® mount sold separately

Description	ITEM #
TLR RM 1 - System - Includes remote pressure switch, mounting clips, CR123A lithium battery - Black	69440
TLR RM 1 - Light Only - Includes key kit and CR123A lithium battery - Black	69441

Size and Weight	Battery
9.25 cm; 85.6g	(1) CR123A lithium




TLR RM 1 with Remote Pressure Switch: 69440

TLR® RM 2

IPX7

Low-profile long gun light featuring a longer reaching, tighter beam

- Designed to provide increased candela while maintaining lumen output
- Independently operating push-button and remote pressure switches
- System is packaged as a kit



22,000 cd




Safe Off feature prevents accidental activation; saves batteries

LUMENS	1,000
CANDELA	22,000
DISTANCE	297m
RUN TIME	1.5 hrs

Strobe runs 3 hours



Optional M-LOK® mount sold separately

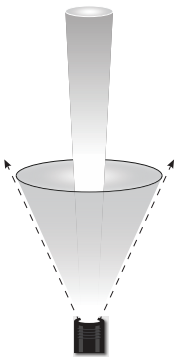

HIGH CANDELA
BEAM PATTERN

Description	ITEM #
TLR RM 2 - System - Includes remote pressure switch, mounting clips and (2) CR123A lithium batteries - Black	69450
TLR RM 2 - Light Only - Includes CR123A lithium battery - Black	69451

Size and Weight	Battery
12.6 cm; 132.7g	(2) CR123A lithium



TLR RM 2 with Remote Pressure Switch: 69450

TLR® RM 1 LASER

WHITE LIGHT ILLUMINATOR / **RED LASER**

IPX4

Low-profile long gun light featuring a longer reaching, tighter beam and red laser

- Designed to provide increased candela while maintaining lumen output
- Independently operating push-button and remote pressure switches
- System is packaged as a kit


LUMENS	500
CANDELA	11,000
DISTANCE	210m
RUN TIME	1.5 hrs

Strobe runs 3 hours
Laser runs 60 hours

11,000 cd



Safe Off feature prevents accidental activation; saves batteries

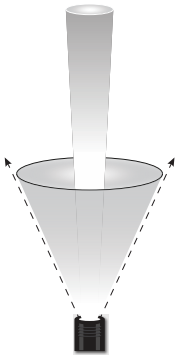

HIGH CANDELA
BEAM PATTERN



Optional M-LOK® mount sold separately

Description	ITEM #
TLR RM 1 Laser - System - Includes remote pressure switch, mounting clips, CR123A lithium battery - Black	69445

Size and Weight	Battery
9.25 cm; 91.9g	(1) CR123A lithium



TLR RM 1 Laser with Remote Pressure Switch: 69445

TLR® RM 2 LASER

WHITE LIGHT ILLUMINATOR / **RED LASER** OR **GREEN LASER**

IPX4

Low-profile long gun light featuring a longer reaching, tighter beam and red or green laser

- Designed to provide increased candela while maintaining lumen output
- Independently operating push-button and remote pressure switches
- System is packaged as a kit


LUMENS	1,000
CANDELA	22,000
DISTANCE	297m
RUN TIME	1.5 hrs

Strobe runs 3 hours
Red laser runs 60 hours
Green laser runs 11 hours

22,000 cd



Safe Off feature prevents accidental activation; saves batteries

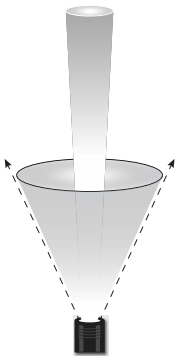

HIGH CANDELA
BEAM PATTERN

Optional M-LOK® mount sold separately



Description	ITEM #
TLR RM 2 Laser - System - Includes remote pressure switch, mounting clips and (2) CR123A lithium batteries - Black	69447
TLR RM 2 Laser-G - System - Includes remote pressure switch, mounting clips and (2) CR123A lithium batteries - Black	69453

Size and Weight	Battery
12.6 cm; 144.7g	(2) CR123A lithium



TLR RM 2 Laser with Remote Pressure Switch: 69447

NEW

TLR® RM 1 HL-X COMPACT RAIL MOUNTED LIGHTING SYSTEM

IPX7


Lightweight and compact, multi-fuel TLR light

- Designed to provide increased candela while maintaining lumen output
- Independently operating push-button and remote pressure switches
- System is packaged as a kit

	SL-B9	CR123A
LUMENS	1,000	500
CANDELA	22,000	11,000
DISTANCE	297m	210m
RUN TIME	30 min	1.5 hrs

1,000 LUMENS

22,000 cd

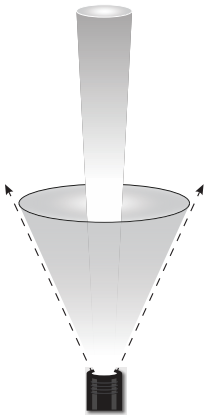

HIGH CANDELA BEAM PATTERN



Safe Off feature prevents accidental activation; saves batteries



Optional M-LOK® mount sold separately

Description	ITEM #
TLR RM 1 HL-X USB - Light Only - Includes key kit and SL-B9 battery pack - Black	69484

Size and Weight	Battery
9.25 cm; SL-B9: 88.5g // CR123A: 85.6g	(1) SL-B9 battery pack

SPEEDLOCKER®

Portable, locking storage container that provides you with swift and direct access

- Patented mechanical keypad with 31 user selectable combinations; requires no batteries
- Rugged, water-resistant construction with convenient carry handle
- Accommodates various fire arms; but is not an approved gun case





Accommodates firearms up to the size of a Glock® 19 with TLR-1 series attached



The SpeedLocker® is not an approved firearm safe. It is the user responsibility to determine the suitability to the specific situation and need.

Description	Item #
SpeedLocker - Includes padlock and Allen Key	59000

The SpeedLocker® is not an approved firearm safe. It is the user responsibility to determine the suitability to the specific situation and need.

Size and Weight
Internal: 31.5 x 20.8 x 7.1 cm // External: 20.3 x 18 cm; 1.2kg

SL-B9® BATTERY PACK

Turn your TLRs into Rechargeable Systems



You know how you make the best performing gun lights in the business even better? Simple. Give users multiple ways to power and charge them. Introducing our SL-B9® Protected Lithium-Ion USB Rechargeable Battery Pack with integrated charging port. Charges by USB cord, or optional bank charger. Flexibility for however and wherever you use your light.

SL-B9® PROTECTED LITHIUM-ION USB RECHARGEABLE BATTERY PACK


The battery that transforms, multi-fuel, high performance gun lights into rechargeable systems

- Features USB-C input and charge status indicators; recharges in 2.5 hours
- Integrated safety circuit protects battery from overcharge



Description	ITEM #
SL-B9 Li-Ion USB rechargeable battery pack - 2pk	20237
SL-B9 Li-Ion USB rechargeable battery pack - 8pk	20238

Size and Weight	Battery
3.45 x 1.7 cm; 20.4g	850mAh SL-B9 protected Li-Ion USB rechargeable battery pack

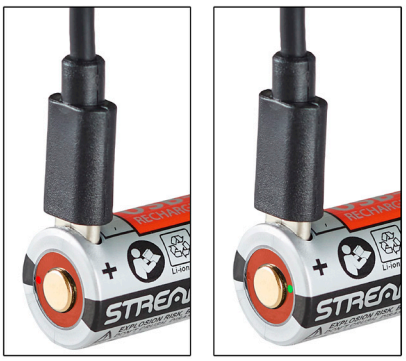

CHARGING CHARGED

PROTAC® RAIL MOUNT 1 LONG GUN LIGHT

IPX7 With Remote Pressure Switch installed

IPX4 With Standard button switch installed

Long gun light that features a dedicated fixed-mount for MIL-STD 1913 or M-LOK® rails

- Uses either a remote switch with momentary/constant on operation or a standard push-button tail switch
- Multi-fuel; uses either a lithium or alkaline battery
- TEN-TAP® Programmable

SL-B9	HIGH	LOW
LUMENS	350	40
CANDELA	12,000	1,380
DISTANCE	219m	19m
RUN TIME	1.75 hrs	14.5 hrs
CR123A	HIGH	LOW
LUMENS	150	500
CANDELA	4,950	1,380
DISTANCE	141m	19m
RUN TIME	1.5 hrs	18 hrs

Strobe runs 2.75 hours



Description	ITEM #
ProTac Rail Mount 1 - Includes remote pressure switch, tailcap switch, mounting hardware, M-LOK mount, (1) AA alkaline battery and (1) CR123A lithium battery - Black	88058

Size and Weight	Battery
10.8 cm; CR123A: 121.9g // Alkaline: 127.57g	(1) CR123A lithium or (1) alkaline

PROTAC® RAIL MOUNT 2 LONG GUN LIGHT

IP54 With Remote Pressure Switch installed

IP67 With Standard button switch installed

Lightweight, gun mounted light that can be used in close quarter combat or to identify medium range threats

- Uses either a remote switch with momentary/constant on operation or a standard push-button tail switch
- MIL-STD 1913 or M-LOK® compatible rails
- TEN-TAP® Programmable

	HIGH	LOW
LUMENS	625	60
CANDELA	22,000	2,000
DISTANCE	297m	89m
RUN TIME	2 hrs	21 hrs

Strobe runs 2.75 hours



Description	ITEM #
ProTac Rail Mount 2 - Includes remote pressure switch, tailcap switch, mounting hardware, M-LOK® mount and (2) CR123A lithium battery - Black	88059

Size and Weight	Battery
12.7 cm; 141.7g	(2) CR123A lithium batteries

PROTAC® RAIL MOUNT HL-X LONG GUN LIGHT

IP54
With Remote Pressure Switch installed

IP67
With Standard button switch installed

High-lumen, rugged, multi-fuel long gun light

- Uses either a remote switch with momentary/constant on operation or a standard push-button tail switch
- MIL-STD-1913 or M-LOK® compatible rails
- TEN-TAP® Programmable

1000 LUMENS



	HIGH	LOW
LUMENS	625	60
CANDELA	50,000	3,100
DISTANCE	447m	111m
RUN TIME CR123A	1.25 hrs	21 hrs
RUN TIME SL-B26	1.75 hrs	24 hrs

Strobe runs 2.5 hours (CR123A) // 3.5 hours (SL-B26)

Description	ITEM #
ProTac Rail Mount HL-X - Includes remote pressure switch, tailcap switch, mounting hardware, M-LOK® mount and (2) CR123A lithium battery - Black	88066

Size and Weight	Battery
13.8 cm; CR123A: 181.4g // SL-B26: 195.6g	(2) CR123A lithium or (1) SL-B26

PROTAC® RAIL MOUNT HL-X PRO LONG GUN LIGHT

IP54
With Remote Pressure Switch installed

IP67
With Standard button switch installed

High-lumen long gun light with Jack Cap® for operational redundancy

- Uses either a remote switch with momentary/constant on operation or a standard push-button tail switch
- MIL-STD-1913 or M-LOK® compatible rails
- TEN-TAP® Programmable

1000 LUMENS





	HIGH	LOW
LUMENS	1,000	60
CANDELA	50,000	3,100
DISTANCE	447m	111m
RUN TIME CR123A	1.25 hrs	21 hrs
RUN TIME SL-B26	1.75 hrs	24 hrs

Strobe runs 2.5 hours (CR123A) // 3.5 hours (SL-B26)

Description	ITEM #
ProTac Rail Mount HL-X Pro USB - Includes Jack-Cap®, M-LOK® kit, momentary switch, hardware kit, 2.5 mm Allen Wrench, (1) SL-B26 battery pack and 101.6 cm USB cord - Box - Black	88127

Size and Weight	Battery
13.8 cm; CR123A: 187.1g // SL-B26: 204.1g	(2) CR123A lithium or (1) SL-B26



PROTAC® RAIL MOUNT HL-X LASER

IPX4

WHITE LIGHT ILLUMINATOR / **RED LASER**

High-lumen, long gun light with integrated red aiming laser with windage and elevation adjustments

- Has unique functionality with its double switches; push button tailcap or remote pressure switch
- Multi-fuel; available as USB rechargeable system or lithium battery version
- TEN-TAP® Programmable

1000 LUMENS

	HIGH	LOW
LUMENS	1,000	60
CANDELA	18,200	1,100
DISTANCE	270m	66m
RUN TIME CR123A	1.25 hrs	20 hrs
RUN TIME SL-B26	1.5 hrs	23 hrs

Strobe runs 2.25 hours (CR123A) // 3.25 hours (SL-B26)



Description	ITEM #
ProTac Rail Mount HL-X Laser - Includes remote pressure switch, tailcap switch, remote retaining clips, mounting hardware and (2) CR123A lithium battery - Black	88089
ProTac Rail Mount HL-X Laser USB - Includes remote pressure switch, tailcap switch, remote retaining clips, mounting hardware and SL-B26 battery pack and USB cord - Black	88090

Size and Weight	Battery
16.83 cm; SL-B26: 306g // CR123A: 292g	(2) CR123A lithium or (1) SL-B26

PROTAC® 2.0 RAIL MOUNT LONG GUN LIGHT

IP67

High performance rail mount light that produces 2,000 lumens without sacrificing run time


- Powered by our proprietary SL-B50 rechargeable battery pack that charges inside the light using a USB-C cord
- MIL-STD 1913 or M-LOK® compatible rails
- TEN-TAP® Programmable

Description	ITEM #
ProTac 2.0 Rail Mount - System - Includes straight momentary pressure switch, SL-B50 battery pack, mounting hardware, USB-C cord and M-LOK® mount - Black	89009
ProTac 2.0 Rail Mount - Light Only - Includes SL-B50 battery pack, USB-C cord and M-LOK® mount - Black	89003

Size and Weight	Battery
16 cm; 257g	(1) SL-B50 rechargeable battery pack

2000 LUMENS



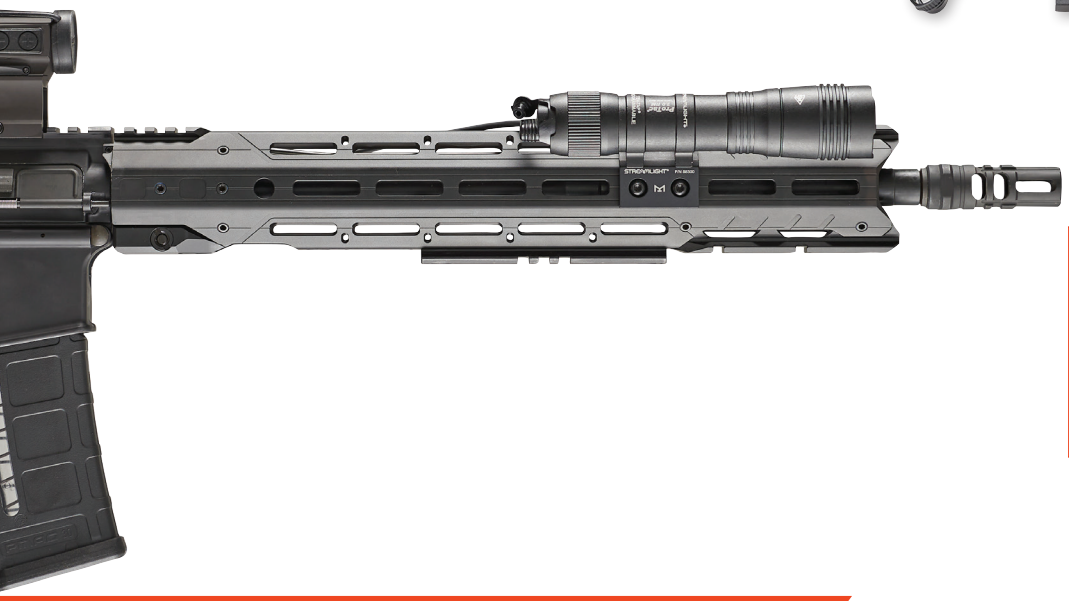

	HIGH	LOW
LUMENS	2,000	250
CANDELA	17,700	2,150
DISTANCE	266m	93m
RUN TIME	2.5 hrs	11 hrs

Strobe runs 4.5 hours

PROTAC RAIL MOUNT ACCESSORIES

DESCRIPTION	ITEM #	PROTAC RAIL MOUNT 1 PROTAC RAIL MOUNT 2	PROTAC RAIL MOUNT HL-X SERIES	PROTAC RAIL 2.0 MOUNT SERIES
CR123A Lithium Batteries - 2pk	85175	√	√	
CR123A Lithium Batteries - 12pk	85177	√	√	
CR123A Lithium Batteries - 400pk	85179	√	√	
SL-B26 Battery Pack - 1pk	22101		√	
SL-B26 Battery Pack - 2pk	22102		√	
SL-B50 Battery Pack - 2pk	22112			√
Straight Momentary Pressure Switch	69135		√	√
Straight Latching Switch	89008		√	√




85175, 85177, 85179




22101, 22102



22112



89008



69135



NEW

PROTAC® RAIL MOUNT HP-X PRO LONG GUN LIGHT

IPX7 Without Remote Pressure Switch installed

IPX4 With Remote Pressure Switch installed

High candela, multi-fuel long gun light with Jack Cap® for operational redundancy

- Jack-Cap® tail cap switch offers operational switch redundancy with both push-button operation or remote pressure switch operation
- TEN-TAP® Programmable

	HIGH	LOW
LUMENS	800	55
CANDELA	105,000	7,600
DISTANCE	648m	174m
RUN TIME SL-B26	2 hrs	26 hrs
RUN TIME CR123A	1.5 hrs	18 hrs

Strobe runs 2.5 hours (CR123A) // 3.5 hours (SL-B26)

105,000 cd





Description	ITEM #
ProTac Rail Mount HP-X Pro USB - System - Includes Jack-Cap® tail cap switch, M-LOK® mount, mounting hardware, Allen wrench, straight momentary pressure switch, (1) SL-B26 battery pack and USB-C cord - Black	89016

Size and Weight	Battery
14.3 cm; SL-B26: 198g // CR123A: 181g	(1) SL-B26 battery pack or (2) CR123A lithium batteries

NEW

PROTAC® 2.0 RAIL MOUNT HP LONG GUN LIGHT

IP67

Rail-mounted long gun light that offers the perfect blend of power; increased candela without sacrificing lumens or run time

- Powered by our proprietary SL-B50 rechargeable battery pack
- Charges inside the light, no need to remove from your weapon
- TEN-TAP® Programmable

2000 LUMENS

	HIGH	LOW
LUMENS	2,000	250
CANDELA	85,000	11,500
DISTANCE	583m	214m
RUN TIME	2.5 hrs	11 hrs

Strobe runs 4.5 hours



Description	ITEM #
ProTac 2.0 Rail Mount HP - System - Includes straight momentary pressure switch, (1) SL-B50 battery pack, mounting hardware, USB-C cord and M-LOK® - Black	89014

Size and Weight	Battery
16 cm; 257g	(1) SL-B50 battery pack



HIGH-CANDELA
WITHOUT SACRIFICING LUMEN OUTPUT

WEDGE®

IPX7

Everyday carry flashlight

- Outfitted with an intuitive rotating thumb switch, providing tactile control over constant-on or THRO® modes
- Ergonomic design fits comfortably in your hand
- Grooved for a suregrip

	THRO	CONSTANT-ON
LUMENS	1,000	300
CANDELA	3,000	1,200
DISTANCE	110m	69m
RUN TIME	35 sec	3 hrs





Description	Item #
Wedge - Includes USB-C cord and lanyard - Box - Black	88810
Wedge - Includes USB-C cord and lanyard - Box - Coyote	88811

Size and Weight	Battery
13.87 cm; 93.5g	Lithium polymer



Battery charge indicator located in the on/off switch



Charge indication:
Red – Charging // Green – Charged

WEDGE® XT

IPX7

Ultra-compact everyday carry flashlight

- Push-button tail switch for one-handed operation
- FIVE-TAP® lockout system prevents accidental activation inside your pocket or bag
- TEN-TAP® Programmable

	HIGH	LOW
LUMENS	500	50
CANDELA	1,900	200
DISTANCE	87m	28m
RUN TIME	2 hrs	11 hrs



Description	Item #
Wedge XT - Includes USB-C cord and lanyard - Coyote	88813

Size and Weight	Battery
10.8 cm; 74.3g	Lithium polymer



Charge indication LED:

Red – Charging;
Green – Charged

Lithium-ion battery charges in 6 hours

PROTAC® 2.0

IP67

High-performance ProTac 2.0 produces 2,000 lumens without sacrificing run time

- TEN-TAP® Programmable
- Durable anodized machined aircraft aluminum construction
- Battery recharges inside the light

2000 LUMENS



	HIGH	MEDIUM	LOW
LUMENS	2,000	570	100
CANDELA	17,300	5,000	890
DISTANCE	262m	142m	60m
RUN TIME	2.5 hrs	4.5 hrs	25 hrs

Strobe runs 4 hours 25 minutes



Description	Item #
ProTac 2.0 - Includes SL-B50 battery pack, USB-C cord and holster - Black	89000

Size and Weight	Battery
15.49 cm; 234g	(1) SL-B50 battery pack

SL-B50® PROTECTED LITHIUM-ION USB RECHARGEABLE BATTERY PACK

The battery that was designed for select Streamlight products

- Features USB-C input and charge status indicators; recharges in 6 hours
- Integrated safety circuit protects battery from overcharge



Description	Item #
SL-B50 Li-Ion USB Rechargeable Battery Pack - 2pk	22112

Size and Weight	Battery
8.28 cm; 85g	4900mAh SL-B26 protected Li-Ion USB rechargeable battery pack

Features integrated USB port
Charge status LEDs:
Red = charging Green = charged



WORKS WITH:



ProTac® 2.0 Headlamp



ProTac® 2.0 Rail Mount



ProTac® 2.0 Handheld



ProTac® 2.0 Rail Mount HP

TEN-TAP® PROGRAMMABLE FOR FLEXIBLE LIGHTING OPTIONS

// What is it?

Do you like most of the features of a flashlight, but not the pre-set programs? Streamlight makes flashlights for a wide variety of applications and we understand that not everyone wants the same amount of light. With TEN-TAP Programming, you can reprogram the light from its default output settings to better fit your needs.

Lights are shipped from the factory with their default output settings. As an example, here are the default settings for the ProTac HL® and how to access them:

- **High**: Tap and hold; click to lock on; click again for off
- **Strobe**: Fast double-tap (within 0.4 seconds) and hold; click to lock on; click again for off
- **Low**: Fast triple-tap (within 0.4 seconds per tap) and hold; click to lock on; click again for off

Reprogramming is easy – with just a few quick taps of the switch, you can change the settings.

// How does it work?

With lights that feature TEN-TAP Programming, you can choose from three user-selectable programs (for example: High/Strobe/Low [default]; High Only; and Low/High).

From the default mode, the next available program on the ProTac HL® would be "High Only," meaning that your flashlight would only come on in "High," no matter how many times you tap the switch. To change to the next program, starting from the "Off" position, tap the switch rapidly 9 times (within 0.4 seconds per tap) and hold it down the 10th time. Continue holding the switch until the light turns off (approximately 1 second), then release the switch. Repeat this process to access the next program (Low/High).

Programmable options differ depending on your flashlight model. Be sure to refer to the product fact sheet and instructions or click the QR code for more information

NEW

PROTAC® 2AA-X

IPX7

Multi-fuel, personal carry tactical flashlight

- TEN-TAP® Programmable
- About the size of a marker, it conveniently fits in your pocket
- Multi-function, push-button tail switch

AA	HIGH	LOW
LUMENS	270	18
CANDELA	5,000	400
DISTANCE	141m	40m
RUN TIME	2.5 hrs	48 hrs

Strobe runs 5 hours



Description	Item #
ProTac 2AA-X - Includes (2) AA alkaline batteries and holster - Black	88083

Size and Weight	Battery
15.3 cm; 99g	(2) AA alkaline

NEW

PROTAC HL® 6

IPX7

Full-size, heavy duty flashlight is a powerhouse of illumination with 2 hours of run time

- TEN-TAP® Programmable
- Recharges in 5 hours
- Sure grip rubber sleeve provides thermal insulation

	HIGH	MEDIUM	LOW
LUMENS	5,300	1,500	450
CANDELA	80,000	23,000	6,700
DISTANCE	566m	303m	164m
RUN TIME	2 hrs	3.75 hrs	12.5 hrs

Strobe runs 4 hours

5300 LUMENS



Description	Item #
ProTac HL 6 - Includes (2) SL-B48 rechargeable batteries "Y" USB-C cord and wrist lanyard - Black	88132

Size and Weight	Battery
26.6 cm; 590g	(2) SL-B48 Li-Ion USB rechargeable battery pack

PROTAC® 90X

IPX7

Multi-fuel, everyday carry light with a twist; features a right-angle head that gives extra lighting capability

- TEN-TAP® Programmable
- Carry in your hand, attach to belt, harnesses or other gear

1000 LUMENS



	HIGH	MEDIUM	LOW
LUMENS	1,000	300	65
CANDELA	7,350	2,060	450
DISTANCE	171m	91m	42m
RUN TIME CR123A	2.5 hrs	4 hrs	21 hrs
RUN TIME SL-B26	1.75 hrs	4.75 hrs	24 hrs

Strobe runs 2.5 hours (CR123A) // 3.5 hours (SL-B26)

Description	Item #
ProTac 90X USB - Includes SL-B26 battery pack and holster - Black	88095

Size and Weight	Battery
11.1 cm; CR123A: 125g // SL-B26: 139g	SL-B26 Li-ion USB rechargeable battery pack; also accepts (2) CR123A lithium batteries

PROTAC® 1L-1AA

IPX7

Ultra-compact, everyday carry flashlight

- TEN-TAP® Programmable
- Multi-fuel - accepts multiple battery sources



CR123A	HIGH	LOW
LUMENS	350	40
CANDELA	6,400	720
DISTANCE	160m	53m
RUN TIME	1.5 hrs	14 hrs

Strobe runs 3 hours

AA	HIGH	LOW
LUMENS	150	40
CANDELA	2,750	720
DISTANCE	105m	53m
RUN TIME Alkaline	1.25 hrs	7.5 hrs
RUN TIME Lithium	4.25 hrs	14 hrs

Strobe runs 3.5 hours (Alkaline)
Strobe runs 8 hours (Lithium)

Description	Item #
ProTac 1L-1AA - Includes AA lithium and alkaline AA batteries and holster - Black	88061

Size and Weight	Battery
10.8 cm; 71g	(1) CR123A lithium or (1) AA alkaline; also accepts AA lithium

PROTAC® 2L-X

IPX7

Multi-fuel tactical light

- TEN-TAP® Programmable
- Multi-battery versatility
- Push-button tail switch for momentary or constant on operation

	HIGH	LOW
LUMENS	500	40
CANDELA	6,800	600
DISTANCE	165m	49m
RUN TIME CR123A	2.75 hrs	30 hrs
RUN TIME SL-B26	3.25 hrs	30 hrs

Strobe runs 3.25 hours (CR123A) // 4.5 hours (SL-B26)



Description	Item #
ProTac 2L-X USB - Includes SL-B26 battery pack, USB cord and holster - Black	88083

Size and Weight	Battery
13 cm; SL-B26: 125g // CR123A: 111g	(1) SL-B26 Li-ion USB rechargeable battery pack or (2) CR123A lithium batteries

PROTAC® HL-X

IP68

Multi-fuel flashlight produces a high lumen beam

- TEN-TAP® Programmable
- Pocket clip for convenience
- Anti roll head design

1000 LUMENS



	HIGH	MEDIUM	LOW
LUMENS	1,000	400	65
CANDELA	27,100	10,000	1,600
DISTANCE	330m	200m	80m
RUN TIME CR123A	1.25 hrs	3 hrs	20 hrs
RUN TIME SL-B26	1.5 hrs	3.5 hrs	23 hrs

Strobe runs 2.5 hours (CR123A) // 3.25 hours (SL-B26)

Description	Item #
ProTac HL-X USB - Includes SL-B26 battery pack, USB cord and holster - Black	88085

Size and Weight	Battery
13.8 cm; SL-B26: 176g // CR123A: 162g	(1) SL-B26 Li-Ion USB rechargeable battery pack or (2) CR123A lithium

POLYTAC®

IPX7

All purpose flashlight designed for a wide range of lighting applications

- High-impact, super-tough nylon polymer with "rocky stipple" texture for a sure grip
- TEN-TAP® Programmable
- Multi-position pocket clip



	HIGH	MEDIUM	LOW
LUMENS	600	260	35
CANDELA	22,000	9,500	1,300
DISTANCE	297m	195m	72m
RUN TIME	2.75 hrs	5.5 hrs	34 hrs

Strobe runs 5.5 hours

Description	Item #
PolyTac - Includes lithium batteries - Clam - Black	88850

Size and Weight	Battery
13.56 cm; 121g	(2) CR123A lithium batteries

POLYTAC 90® X

IPX7

Flexible, rugged flashlight with a right angled head

- Durable construction
- Multi-fuel with built in battery life indicator



NFPA Meets requirements of NFPA 1971-8.6 (2024)

	HIGH	LOW
LUMENS	500	85
CANDELA	7,000	1,050
DISTANCE	167m	64m
RUN TIME	3.75 hrs	19 hrs

Description	Item #
PolyTac 90 X USB - Includes SL-B26 battery pack - Orange	88838
PolyTac 90 X USB - Includes SL-B26 battery pack - Black	88835

Size and Weight	Battery
11.25 cm; SL-B26: 136g // CR123A: 122g	(1) SL-B26 battery pack; or (2) CR123A lithium batteries

POLYTAC® X

IPX7

Rugged, multi-fuel flashlight with polymer construction

- High-impact, super-tough nylon polymer with "rocky stipple" texture for a sure grip
- TEN-TAP® Programmable
- Removable, multi-position pocket clip



NFPA
Flashlight meets 500°F requirements of NFPA 1971-8.6 (2018)

	HIGH	MEDIUM	LOW
LUMENS	600	260	35
CANDELA	11,485	4,930	675
DISTANCE	205m	135m	50m
RUN TIME CR123A	2.75 hrs	5.5 hrs	34 hrs
RUN TIME SL-B26	3.5 hrs	5.75 hrs	36 hrs

Strobe runs 5.5 hours (CR123A) // 8 hours (SL-B26)



Description	Item #
PolyTac X USB - Includes SL-B26 battery pack and USB cord - Box - Black	88613

Size and Weight	Battery
13.87 cm; SL-B26: 139g // CR123A: 125g	(1) SL-B26 battery pack; or (2) CR123A lithium batteries

PROTAC AND POLYTAC ACCESSORIES

DESCRIPTION	ITEM #	PROTAC 90X	PROTAC 1L-1AA	PROTAC HL USB	PROTAC 2L-X	PROTAC HL-X	PROTAC 2AA-X	POLYTAC	POLYTAC 90 X USB	POLYTAC X
CR123A Lithium Batteries - 2pk	85175	√	√	√	√	√	√	√	√	√
CR123A Lithium Batteries - 12pk	85177	√	√	√	√	√	√	√	√	√
CR123A Lithium Batteries - 400pk	85179	√	√	√	√	√	√	√	√	√
SL-B26 Battery Pack - 1pk	22101	√		√	√	√			√	√
SL-B26 Battery Pack - 2pk	22102	√		√	√	√			√	√



85175, 85177, 85179


22101, 22102

SL-B26® PROTECTED LITHIUM-ION USB RECHARGEABLE BATTERY PACK

The battery that transforms multi-fuel, high performance lighting tools into rechargeable systems

- Features USB-C input and charge status indicators; recharges in 5 hours
- Integrated safety circuit protects battery from overcharge
- Charge via USB source or optional charge cradle



Description	Item #
SL-B26 Li-Ion USB Rechargeable Battery Pack - 1pk	22101
SL-B26 Li-Ion USB Rechargeable Battery Pack - 2pk	22102

Size and Weight	Battery
7 cm; 48g	2600mAh SL-B26 protected Li-Ion USB rechargeable battery pack



Charger temperature safety circuit prevents damage to batteries while charging.

EIGHT-UNIT SL-B26® BANK CHARGER

Charge up to eight batteries with Streamlight's lithium-ion bank charger

- Charge indicators over each battery; recharges in 5.25 hours
- Each charge bay securely holds the battery in place
- Ideal for mounting on trucks; 1" (2.54 cm) low profile housing

NFPA
Charging rack meets requirements of NFPA 1900-11.1.11.2 (2024) mounted in any position




Int'l Charge Cord

Description	Item #
8-Unit SL-B26 Bank Charger - Includes (8) SL-B26 batteries - 230V AC	20225

Size and Weight
26.54 x 12.06 x 2.54 cm; 216g with batteries

SIDEWINDER STALK ®

IP67

Military helmet light system with flexible stalk

- Provides ultimate maneuverability, multiple mounting options, and a flexible stalk to aim the beam
- Features white, IR, red, blue, and green LEDs – all located in the head mounted on a flexible stalk – each with low, medium, high, and strobe modes along with an additional IR/IFF beacon
- A separate Identification Friend or Foe (IFF) switch lets you use both the main light and IFF when needed



High 100% Output - CR123A

	WHITE LED	IR LED	RED LED	BLUE LED	GREEN LED	3535 IFF IR IED
LUMENS	76	5.0 lmW/sr (min) radiant intensity	9	8	20	5.0 lmW/sr (min) radiant intensity
DISTANCE	28m	---	7m	8m	12m	---
RUN TIME	5.6 hrs	32 hrs	19 hrs	13 hrs	13 hrs	21 hrs

High 100% Output - AA LITHIUM/ALKALINE

	WHITE LED	IR LED	RED LED	BLUE LED	GREEN LED	3535 IFF IR IED
LUMENS	57	5.0 lmW/sr (min) radiant intensity	9	8	20	5.0 lmW/sr (min) radiant intensity
DISTANCE	23m	---	7m	8m	12m	---
RUN TIME Lithium	6 hrs	33 hrs	19 hrs	13 hrs	13 hrs	32 hrs
RUN TIME Alkaline	3.8 hrs	20 hrs	10 hrs	6 hrs	5 hrs	19 hrs



Description	Item #
Sidewinder Stalk - Includes helmet clip, ARC rail mount and assembly, CR123A & AA alkaline battery – Coyote – Mailer	14301
Sidewinder Stalk - Includes helmet clip, CR123A and AA alkaline battery – Coyote – Box	14306
Sidewinder Stalk - Includes ARC rail mount & assembly, CR123A and AA alkaline battery – Coyote – Box	14307
Sidewinder Stalk - Includes helmet clip, E-mount, CR123A and AA alkaline battery – Coyote – Box	14308

Size and Weight	Battery
14 cm; AA battery with Look & Hook Adapter: 81.65g // CR123A battery with Look & Hook Adapter: 90.7g	(1) AA alkaline or lithium or (1) CR123A lithium batteries

SIDEWINDER STALK BATTERY RUN TIME				
CR123A LITHIUM BATTERY				
LED	Low	Medium	High	Strobe
WHITE	95h	15h	5.6h	11h
RED	112h	36h	19h	34h
GREEN	80h	27h	13h	25h
BLUE	80h	27h	13h	25h
IR	174h	57h	32h	61h
IR W/ IFF BEACON	150h	40h	21h	43h
"AA" LITHIUM/ALKALINE BATTERY				
WHITE	79h(lith) 66h(alk)	16h(lith) 8h(alk)	6h(lith) 3.8h(alk)	11h(lith) 5.5h(alk)
RED	109h(lith) 85h(alk)	36h(lith) 24h(alk)	19h(lith) 10h(alk)	36h(lith) 25h(alk)
GREEN	84h(lith) 55h(alk)	26h(lith) 15h(alk)	13h(lith) 5h(alk)	23h(lith) 17h(alk)
BLUE	77h(lith) 61h(alk)	25h(lith) 16h(alk)	13h(lith) 6h(alk)	25h(lith) 18h(alk)
IR	173h(lith) 145h(alk)	55h(lith) 39h(alk)	33h(lith) 20h(alk)	60h(lith) 41h(alk)
IR W/ IFF BEACON	187h(lith) 115h(alk)	51h(lith) 38h(alk)	32h(lith) 19h(alk)	47h(lith) 35h(alk)

SIDEWINDER®

IPX7

High-impact, hands-free military light with 185° tilting head

- White, red, blue, green and IR LEDs (see specific model)
- Pull-to-turn locking rotary knob prevents accidental mode changes
- Cord attachment holes on body, capable of supporting 50 lbs. of load
- Gear clip to allow for ideal postioning of the light



	HIGH
LUMENS	55
CANDELA	1,175
DISTANCE	69m
RUN TIME	5.5 hrs

Description	Item #
Sidewinder Military - Includes (2) AA alkaline batteries - Coyote	14032
Sidewinder Military - Includes E-mount and (2) AA alkaline batteries - Coyote	14031

Size and Weight	Battery
11.81 cm; Lithium: 124g // Alkaline: 142g	(2) AA alkaline batteries for extended operation in extreme temps (-40°F to 150°F)

SIDEWINDER LIGHT OUTPUT & BATTERY RUN TIME

LED	Light Output	Low 5% Output	Medium 1 25% Output	Medium 2 60% Output	High 100% Output	Strobe 100% Output
White	55 Lumens	100 hrs+	45 hrs	11 hrs	5.5 hrs	10 hrs
IR	25mW/sr (min) radiant intensity	200 hrs+	140 hrs	60 hrs	24 hrs	40 hrs
Red	1 Lumen	200 hrs+	140 hrs	60 hrs	24 hrs	40 hrs
Blue	1.8 Lumens	150 hrs+	100 hrs	35 hrs	16 hrs	30 hrs
Green	4.5 Lumens	150 hrs+	100 hrs	35 hrs	16 hrs	30 hrs

All run time to 10% of initial output level. Illumination output electronically regulated.

SIDEWINDER COMPACT® II

IPX7

Extremely versatile military light with 185° tilting head for multiple tasks

- White, red, blue, green and IR LEDs (see specific model)
- Fits in the palm of your hand or clips to MOLLE vest, belt, hat or pocket
- Cord attachment holes on body, capable of supporting 50 lbs. of load
- Meets MIL-STD-810F, METHOD 512.4



	HIGH CR123A	HIGH Lithium	HIGH Alkaline
LUMENS	55	47	47
CANDELA	1,175	1,000	1,000
DISTANCE	69m	63m	63m
RUN TIME	6 hrs	6 hrs	2 hrs

Description	Item #
Sidewinder Compact II Military - Includes CR123A lithium battery - Box - Coyote	14516
Sidewinder Compact II Military - Includes helmet mount, headstrap and CR123A lithium battery - Box - Coyote	14514

Size and Weight	Battery
7.62 cm; 68g // 94g with helmet mount	(1) CR123A lithium, or (1) AA alkaline, or (1) AA lithium battery

NEW

SIDEWINDER® X

IPX7

Multi-fuel, high-output military light with 185° tilting head

- White, red, blue, green and IR LEDs (see specific model)
- Pull-to-turn locking rotary knob prevents accidental mode changes
- Cord attachment holes on body, capable of supporting 50 lbs. of load
- Fits existing Sidewinder helmet mounts and adapters



	HIGH	MEDIUM 2	MEDIUM 2	LOW
LUMENS	250	80	35	5
CANDELA	3,200	900	400	50
DISTANCE	113m	60m	40m	14m
RUN TIME Alkaline	4.75 hrs	13 hrs	30 hrs	150+ hrs
RUN TIME CR123A	2.75 hrs	8 hrs	19 hrs	100+ hrs

Strobe runs 10.5 hours (AA) // 5.75 hours (CR123A)

MILITARY MODEL






AVIATION MODEL





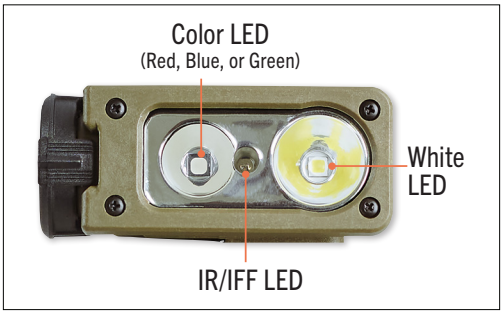



Push button on/off switch and rotary selector knob

Gear clip with integral helmet mount features

Multiple mounting options for your helmet









Description	Item #
Sidewinder X Military Model - White, Red, Blue, IR LEDs - Includes E-Mount and (2) AA alkaline batteries - Coyote	14800
Sidewinder X Aviation Model - White, Green, Blue, IR LEDs - Includes MOLLE retainer and (2) AA alkaline batteries - Coyote	14802

Size and Weight	Battery
11.7 cm; CR123A: 96.6g // AA: 124.7g	(2) AA alkaline battery or (1) CR123A lithium for extended operation in extreme temps (-40°F to 150°F)

IR & Color LEDs					
		IR	RED	BLUE	GREEN
HIGH MODE	LUMENS	12mW	6.5	2.0	8.0
	CANDELA	---	40	12	83
	DISTANCE	---	13m	7m	18m
	RUN TIME Alkaline	40 hrs	50 hrs		
	RUN TIME CR123A	20 hrs	30 hrs		
LOWER MODE RUN TIMES	MED 2 (60%)	130 hrs (AA) 65 hrs (CR123A)	100 hrs (AA) // 70 hrs (CR123A)		
	MED 1 (25%)	330 (AA) 170 hrs (CR123A)	250 hrs (AA) // 150 hrs (CR123A)		
	LOW (5%)	600+ hrs (AA) 300+ hrs (CR123A)	300+ hrs (AA) // 200+ hrs (CR123A)		
	STROBE	100+ hrs (AA) // 50+ hrs (CR123A)			

SIDEWINDER ACCESSORIES

DESCRIPTION	ITEM #	SIDEWINDER COMPACT II	SIDEWINDER	SIDEWINDER STALK
Elastic Headstrap	14059	√		
E-Mount (ACH, ECH, MICH, LWH compatible)	14136	√	√	√
Sidewinder NVG Mount	14155	√	√	√



14059



14136



14155







USB HAZ-LO® HEADLAMP

HAZ-LO DIVISION 1 LIGHTING

IP67

Rechargeable, Class 1, Div 1 headlamp

- Multiple modes cover a variety of tasks with just one light; spot, flood and combo
- Charge indicator LEDs: Red=charging; Green=charged; charges in 4.5 hours
- Multi-function switch is easy to use with gloved hands



	SPOT	FLOOD	COMBO
LUMENS	190	120	250
CANDELA	2,000	90	--
DISTANCE	89m	19m	--
RUN TIME	7.5 hrs	13 hrs	7 hrs

Class I, II, Div. 1,
Grps. A, B, C, D, E, F, G
Class III, CL 1, Zn 0, IIC
T-Code: T4





Description	Item #
USB HAZ-LO Headlamp - Includes 230V AC cord, elastic headstrap, rubber hard hat strap & 3M® Dual Lock® - Box - Yellow	61462

Size and Weight	Battery
4.39 cm; 162g	Lithium-ion

ENDURO® PRO HAZ-LO® ATEX

HAZ-LO ZONE 0 LIGHTING

IP67

Low-profile Zone 0 headlamp with multiple lighting modes

- Safety-rated flashlight
- Multiple modes cover a variety of tasks with just one light; spot, flood and combo
- Multi-function switch is easy to use with gloved hands



	SPOT	FLOOD	COMBO
LUMENS	160	160	235
CANDELA	1,320	100	--
DISTANCE	73m	20m	--
RUN TIME	5 hrs	5 hrs	4.75 hrs



Description	Item #
Enduro Pro HAZ-LO ATEX - Includes (3) AAA alkaline batteries, elastic headstrap and rubber hard hat strap - Orange	61428

Size and Weight	Battery
5.68 cm; 99.2g	(3) AAA alkaline

II 1G Ex ia op is IIC T4 Ga
FTZU 18 ATEX 0101X

Ex ia op is IIC T4 Ga
IECEx FTZU 19.0003X

3AA HAZ-LO® ATEX HEADLAMP

IPX4

Zone 0, ATEX-rated headlamp with a long run time

- Push-button, on/off switch
- Exceptional light output

	LOW
LUMENS	270
CANDELA	5,600
DISTANCE	150m
RUN TIME	8 hrs



Ex ia op is IIC T4 Ga
IECEx FTZU 19.0003X

II 1G Ex ia op is IIC T4 Ga
FTZU 18 ATEX 0101X

Description	Item #
3AA HAZ-LO ATEX Headlamp - Includes alkaline batteries elastic and rubber straps - Orange	61250

Size and Weight	Battery
7.82 cm; 201.3g	(3) AA alkaline

PROTAC® 2.0 HEADLAMP

IP64

Ultra-powerful, rechargeable headlamp

- Powered by our SL-B50® rechargeable battery pack
- USB-C rechargeable, inside of the light; recharges in 6 hours
- TEN-TAP® Programmable

2000 LUMENS



	HIGH	MEDIUM	LOW
LUMENS	2,000	650	110
CANDELA	14,500	4,200	750
DISTANCE	241m	130m	55m
RUN TIME	2.25 hrs	4.5 hrs	25 hrs



Description	Item #
ProTac 2.0 Headlamp - Includes SL-B50 battery, USB-C cord, elastic and rubber straps - Black	89001

Size and Weight	Battery
12.5 cm; 297.1g	SL-B50 battery pack



TWIN-TASK® USB HEADLAMP

IPX4

Low profile, spot and flood headlamp

- Ergonomically balanced design; contoured, adjustable battery pack for wearer comfort
- Multi-function push-button with mode memory
- 120° tilting head



Spot	HIGH	MEDIUM	LOW
LUMENS	375	175	50
CANDELA	3,650	1,850	440
DISTANCE	121m	86m	42m
RUN TIME	4.75 hrs	8.5 hrs	20 hrs



Flood	HIGH	LOW
LUMENS	250	125
CANDELA	160	80
DISTANCE	25m	18m
RUN TIME	5 hrs	9 hrs



Description	Item #
Twin-Task USB Headlamp - Includes USB cord and elastic head strap - Box - Red	51064
Li-ion Battery Stick	74175



Size and Weight	Battery
6.78 cm; 173g	Lithium-ion



BANDIT® PRO

IPX4

Lightweight, long lasting headlamp

- Snap-in clip adaptor attaches to a pocket, jacket or to the visor on a hat; adds additional downward adjustability
- USB rechargeable with battery life indicator
- Smooth and diffused light for up close tasks

	HIGH	LOW
LUMENS	180	35
RUN TIME	4.5 hrs	21 hrs

Emergency flash - 180 lumens



Description	Item #
Bandit Pro - Includes USB cord, elastic head strap, rubber hard hat strap and 3M® Dual Lock® - Box - Yellow	61716

Size and Weight	Battery
6.86 cm; 45.4g	Rechargeable lithium polymer

ENDURO® PRO USB

IPX4

Multi-function, USB rechargeable headlamp

- Save money over the cost of standard batteries with rechargeability
- Charge indicator LEDs: Red=charging; Green=charged; charges in 4 hours
- Remembers last mode used; defaults to low beam when powering on

Spot	HIGH	MEDIUM	LOW
LUMENS	200	90	25
CANDELA	2,080	890	250
DISTANCE	91m	60m	32m
RUN TIME	6.25 hrs	19 hrs	48 hrs





Flood	HIGH	MEDIUM	LOW
LUMENS	145	50	15
CANDELA	220	80	30
DISTANCE	30m	18m	11m
RUN TIME	7 hrs	21 hrs	48 hrs

Description	Item #
Enduro Pro USB - Includes USB cord, elastic headstrap, rubber hard hat strap and 3M® Dual Lock® - Yellow	61436

Size and Weight	Battery
5.56 cm; 102g	Lithium Polymer

ENDURO®

IPX7

Ultra-compact, lightweight headlamp

- Features a visor clip that attaches to your hat for hands-free use
- Multi-function push-button switch
- Solid state power regulation provides maximum light output throughout battery life

	HIGH	LOW
LUMENS	50	10
CANDELA	1,100	285
DISTANCE	66m	33m
RUN TIME	5.5 hrs	25 hrs



Description	Item #
Enduro - Includes alkaline batteries, visor clip and elastic head strap - Yellow	61400

Size and Weight	Battery
4.06 cm; 77.96g	(3) “AAA” alkaline

TRIDENT®

IPX4

Headlamp with the broadest range of lighting applications for everyday use

- Meets lighting needs for both close-up and distance work
- Push-button switch is easy to use when wearing gloves and is recessed to protect it from inadvertent activation
- Low-level battery indicator visible in the facecap of each light throughout battery life

	HIGH	MEDIUM	LOW
LUMENS	80	35	11
CANDELA	4,000	385	120
DISTANCE	126m	39m	22m
RUN TIME	5 hrs	10 hrs	53 hrs

Description	Item #
Trident Div. 2 - Includes alkaline batteries, rubber and elastic head straps - Yellow	61050

Size and Weight	Battery
6.85 cm; 156g	(3) AAA alkaline

Class I, Div. 2, Grps. A, B, C, D;
Class II, Div. 2, Grps. F, G,
Class III, T-Code: T5



SEPTOR®

IPX4

For “up close” tasks or at arm’s length work where seeing details is important, a soft flood light may be more appropriate than extreme brightness or reach

- 90° tilting head so you can aim the light where you need it
- Soft flood light maximizes eye strain
- 1, 3 or 7 LEDs lighting modes

	HIGH	MEDIUM	LOW
LUMENS	120	45	13
CANDELA	900	375	100
DISTANCE	60m	33m	20m
RUN TIME	3.5 hrs	10 hrs	55 hrs

Description	Item #
Septor Div. 2 - Includes alkaline batteries, rubber and elastic head straps - Yellow	61052

Size and Weight	Battery
6.85 cm; 156g	(3) AAA alkaline

Class I, Div. 2, Grps. A, B, C, D;
Class II, Div. 2, Grps. F, G,
Class III, T-Code: T5





STREAMLIGHT JR. F-STOP®

IPX4

Handheld flood to spot work light

- It provides a smooth flood beam to illuminate your work area without tiring your eyes
- Slide the lens forward for a smooth transition to a spot beam for distance lighting

	FLOOD	SPOT
LUMENS	250	220
CANDELA	360	5,600
DISTANCE	38m	150m
RUN TIME Alkaline	6 hrs	6 hrs
RUN TIME Lithium	10 hrs	10 hrs



Description	Item #
Streamlight Jr. F-Stop - Includes (2) batteries - Black	71701

Size and Weight	Battery
16.51 cm; 125g	(2) AA alkaline or lithium



NEW

MEGASTREAM® USB

IPX7

Extremely bright USB rechargeable flashlight combines intense brightness with long distance beam reach

- Push-button tail switch with momentary or constant on operation
- Metal sleeve protects charging port; slide sleeve back to reveal the port
- Self-keying battery ensures proper alignment of the charging port; recharges in 5 hours

	HIGH	MEDIUM	LOW
LUMENS	1,800	500	150
CANDELA	26,000	7,200	2,100
DISTANCE	322m	170m	92m
RUN TIME	2 hrs	3.5 hrs	13 hrs

Description	Item #
MegaStream USB - Includes USB-C cord, lanyard and SL-B34 battery pack - Black	66210

Size and Weight	Battery
13.4 cm; 152g	(1) SL-B34 battery pack

1800 LUMENS



MACROSTREAM® USB

IPX4

Personal, compact light fits in the palm of your hand and provides unparalleled performance for its size

- Durable aluminium construction
- Pocket clip attaches to visor
- Charges in 4 hours

	HIGH	LOW
LUMENS	500	50
CANDELA	2,000	220
DISTANCE	90m	30m
RUN TIME	2 hrs	8 hrs



Description	Item #
MacroStream USB - Includes USB cord & lanyard - Black	66320

Size and Weight	Battery
11.43 cm; 62.4g	Lithium-ion



MICROSTREAM®

IPX4

Small but powerful flashlight

- Clip it to your hat or pocket
- Alkaline battery powered

LUMENS	45
CANDELA	420
DISTANCE	41m
RUN TIME	2.25 hrs





Description	Item #
MicroStream - Includes (1) AAA alkaline battery - Black	66318

Size and Weight	Battery
9.14 cm; 31.18g	(1) AAA alkaline battery

MICROSTREAM® USB

IPX4

Rechargeable pocket light

- Removable clip; attaches to pocket or hat for hands-free use
- Metal sleeve protects charging port; slide sleeve back to reveal port
- Recharges in 4 hours

	HIGH	LOW
LUMENS	250	50
CANDELA	1,150	250
DISTANCE	68m	31m
RUN TIME	1.5 hrs	3.5 hrs



Description	Item #
MicroStream USB - Includes USB cord & lanyard - Black	66604
MicroStream USB - Includes USB cord & lanyard - Coyote	66609

Size and Weight	Battery
9.83 cm; 34.1g	Lithium-ion

STREAM ACCESSORIES

DESCRIPTION	ITEM #	MACROSTREAM USB	MICROSTREAM USB	MEGASTREAM USB
SL-B34® Battery	22131			√
Lithium-ion Battery	66321	√		
Lithium-ion Battery	66607		√	
230V AC USB Charge Cord	22072	√		
Lanyard	72024	√	√	



22131



66321



66607


22072


72024

STYLUS® UV

IPX4

Thin, lightweight, ultraviolet light

- Perfect for detecting HVAC leaks, fraudulent documents and in forensic investigations



365nm UV LED	
LUMENS	3.8 mW
RUN TIME	24 hrs

Description	Item #
Stylus Black - 365 nm UV LED - Clam - Black	65069

Size and Weight	Battery
15.17 cm; 31g	(3) AAAA alkaline

STYLUS® ATEX

HAZ-LO ZONE 1 LIGHTING

IPX4

Bright, long running LED penlight

- Long battery life
- Removable pocket clip



LUMENS	11
CANDELA	140
DISTANCE	24m
RUN TIME	24 hrs

IEC IECEx Ex ia IIC T3/T4 Ga IECEx BAS 14.0034

Ex II 1G Ex ia IIC T3/T4 Ga BASEEFA 14ATEX0072

Description	Item #
Stylus Black ATEX - White LED - Clam - Black	65082

Size and Weight	Battery
15.17 cm; 31g	(3) AAAA alkaline

STYLUS® REACH ATEX

HAZ-LO ZONE 1 LIGHTING

IPX4

Stylus light with 35.6 cm of flexible twist and turn reach cable

- High-intensity white LED
- Removable pocket clip





LUMENS	11
CANDELA	140
DISTANCE	24m
RUN TIME	24 hrs

IEC IECEx Ex ia IIC T3/T4 Ga IECEx BAS 14.0034

Ex II 1G Ex ia IIC T3/T4 Ga BASEEFA 14ATEX0072

Description	Item #
Stylus Reach ATEX - Black with White LED - Clam - Black	65682

Size and Weight	Battery
35.6 cm; 48.19g	(3) AAAA alkaline

STYLUS® PRO

IPX4

Sleek and compact, high performance pen light

- Use for close up inspections or shine across the room
- Beam distance of 62 meters



LUMENS	100
CANDELA	950
DISTANCE	62m
RUN TIME	8 hrs

Description	Item #
Stylus Pro - Black with White LED - Clam - Black	66118

Size and Weight	Battery
13.4 cm; 46.9g	(2) AAA alkaline

NEW

STYLUS PRO® HAZ-LO®

IPX7

Intrinsically safe, durable, alkaline pen light

- Features a tail switch with momentary and constant on operation
- Chemical-resistant polymer construction



LUMENS	105
CANDELA	380
DISTANCE	39m
RUN TIME	2.25 hrs

Description	ITEM #
Stylus Pro HAZ-LO - Includes batteries - Yellow	66300

Size and Weight	Battery
15 cm; 53.9g	(2) AAA alkaline



CLIPMATE® USB

IPX4

Multi-function clip light for hands-free use

- Features a white LED and a 620-630 nm red LED
- Built-in USB charge tab
- Recharges by plugging into USB port or optional AC wall adapter

White LED	HIGH	LOW	Red LED	HIGH	LOW
LUMENS	70	10	LUMENS	0.5	0.2
CANDELA	500	50	CANDELA	9	3
DISTANCE	44m	14m	DISTANCE	6m	3m
RUN TIME	3.5 hrs	24 hrs	RUN TIME	16 hrs	65 hrs

Description	Item #
ClipMate USB	61125

Size and Weight	Battery
8.13 cm; 53.86g	Lithium Polymer Cell



POCKET MATE®

IPX4

Small but powerful hands-free light

- Ultra-compact design makes it easy to always carry it with you
- Multi-function push-button switch with charge indicator
- Recharges in 4 hours


	HIGH	LOW
LUMENS	325	45
CANDELA	1,450	200
DISTANCE	76m	28m
RUN TIME	20 min	1 hr



Description	Item #
Pocket Mate - Includes Micro-USB cord - Silver	73300
Pocket Mate - Includes Micro-USB cord - Red	73301
Pocket Mate - Includes Micro-USB cord - Blue	73302

Size and Weight	Battery
5.1 cm; 14.2g	Lithium Polymer





Streamlight, Inc.
30 Eagleville Road
Eagleville, PA U.S.A 19403
streamlight.com

(800) 523-7488 Toll-Free
(800) 220-7007 Fax
(610) 631-0600
(610) 631-0712 Fax

#StreamlightStrong

©2025 Streamlight, Inc. ISO 9001:2015 certified 991182-Rev C 2 /25 asi/89871
All rights reserved. Trademarks of companies mentioned herein appear for identification purposes only and are the property of their respective companies.